

Wafer-2

Suspended/Surface



Width 59mm




Height 43mm



Light output 120°

Fixing centres 505mm.

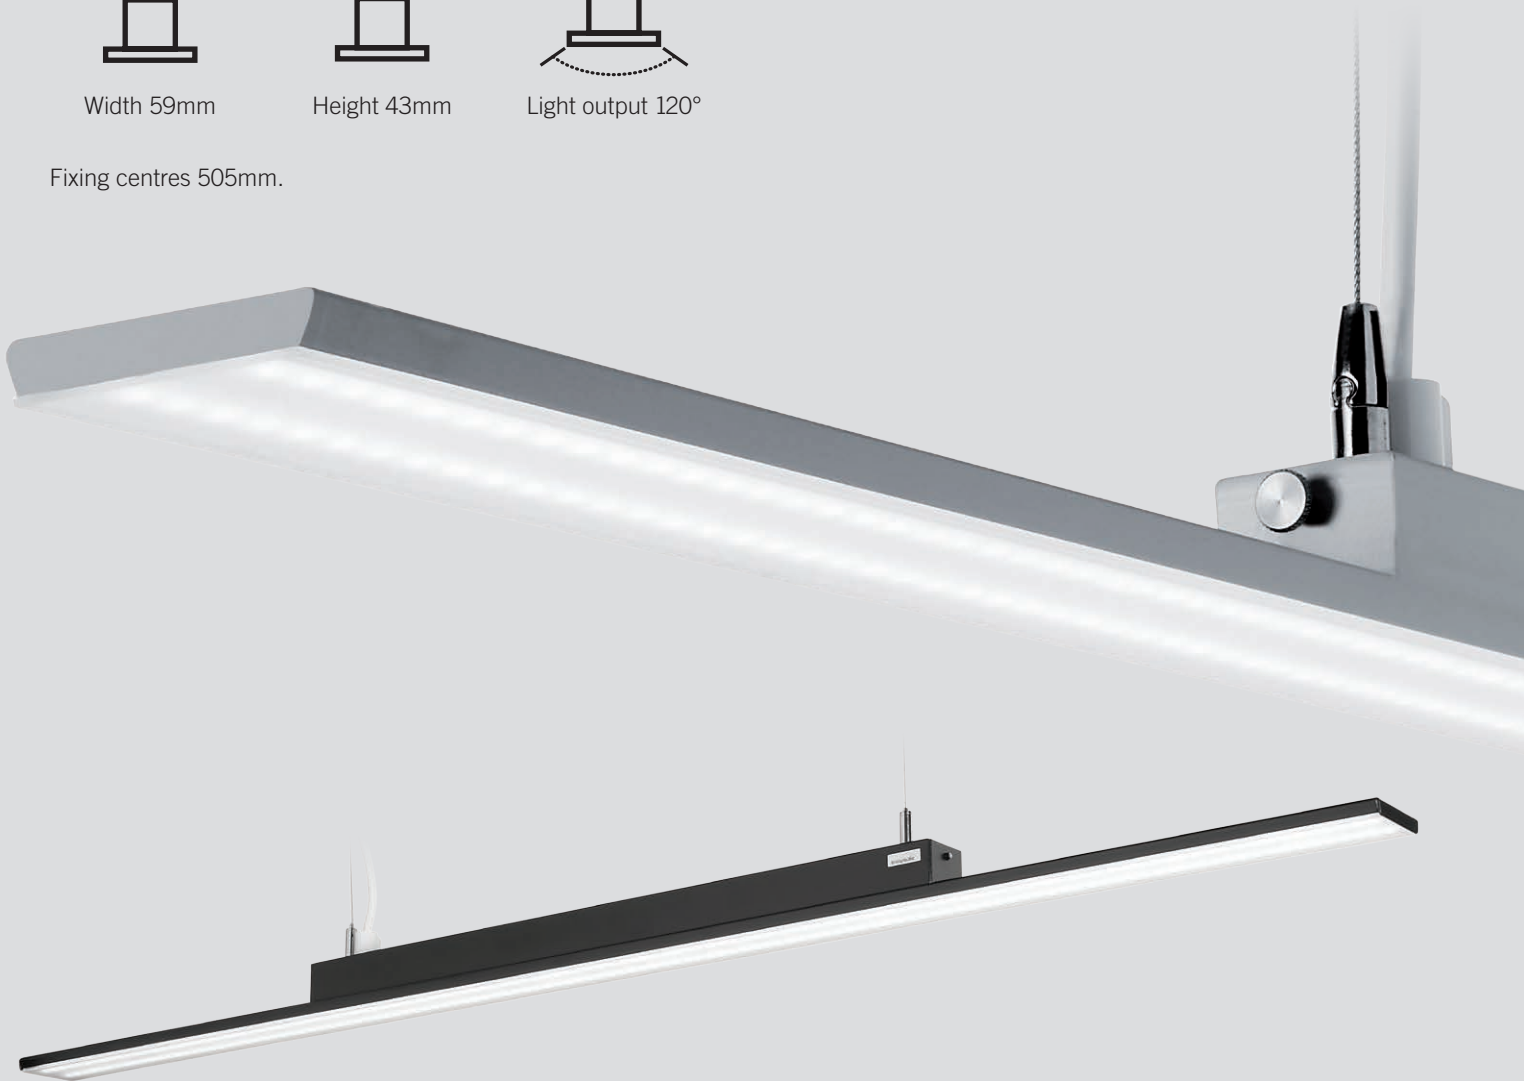

Aluminium/steel diffused LED light, integral driver.

The Wafer-2 LED luminaire has twin row LEDs with flush fitting diffuser, this can be suspended horizontally or surface mounted. The light offers a 120° light distribution through its polycarbonate opal diffuser.

Offering switched, 1-10v or DALI dimming options for a controllable level of light.

Suitable for almost any interior application.



Wafer-2

Suspended/Surface

Light source information

LED/Electronic Driver 3000k 4000k.

Design

Suspended horizontally or surface mounted.

Polycarbonate opal diffuser, aluminium body.

IP20.

Class I, ta 25°C 850GWT.

Dimming

Non-dimmable as standard.

DALI or 1-10v available.

Installation

Two suspension points for fully adjustable horizontal suspension.

Surface mounting.

Optics

Opal diffuser.

Photometric data available.

Miscellaneous

No emergency option.

If you would like to change something, please ask.

Mounting options



Suspension

WAFER-2 SUSPENDED/SURFACE

PART No	LENGTH mm	LM/W	Lumens Circ W.
W2 F0	1170	2650	93
W2 1-10v	1170	2650	93
W2 DALI	1170	2650	93



For further information or options, call +44 (0) 1525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk