

LED-X RD

Suspended/Surface



H25mm x W28mm



Light output

Fixing centres anywhere within 150mm each end.



Extruded aluminium diffused LED light, remote driver.

The LED- X RD is an aluminium extrusion, LED luminaire, remote driver up to 5m away with opal diffuser, this can be suspended horizontally or surface mounted with discreet clips.

Offering switched or DALI/1-10v dimming options for a controllable level of light.

Suitable for almost any interior application.

LED-X RD

Suspended/Surface

Light source information

LED/Electronic Driver 3000k 4000k 6000k Blue, other variants to order please enquire.

700mA.

Design

Suspended horizontally or surface mounted. Remote driver.

Polycarbonate opal diffuser, aluminium body.

IP20.

Class II, ta 25°C, 850GWT.

Dimming

Non-dimmable as standard.

DALI or 1-10v available.

Installation

Two suspension points for fully adjustable horizontal suspension.

Surface mounting.

Installation instructions available on request.

Optics

Opal diffuser.

Clear diffuser available.

Photometric data available.

Miscellaneous

No emergency option.

If you would like to change something, please ask.


Mounting options



Suspension



Mounting clips

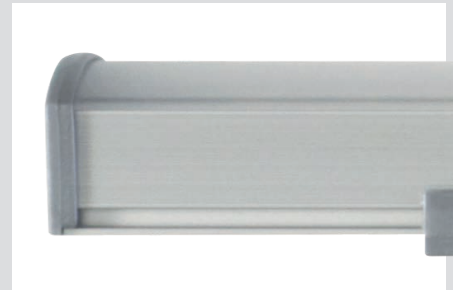

LED-X RD 700MA REMOTE DRIVER

PART No	mA	Lm	WATTS w	LENGTH mm	DRIVER TYPE
LED-X RD 1-700		505	8.0	300	CL700L-240-C
LED-X RD 2-700		1010	16.0	580	CL700-240-C
LED-X RD 3-700		1640	19.2	860	CL700-240-C
LED-X RD 4-700		2470	25.6	1140	CL700-240-C
LED-X RD 5-700		2932	32.0	1420	CL700-240-C



For further information or options, call +44 (0) 1525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk