

MT50-LED-F IP67

Suspended/Surface

encapsulite

ILLUMINATING BY DESIGN




Tube \varnothing 50mm



Cap \varnothing 55mm



Light output 180°

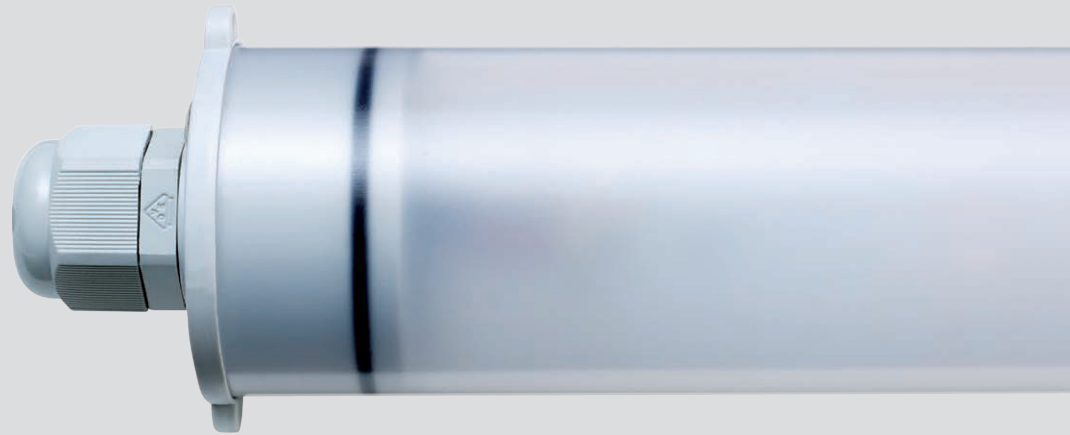


Tubular diffused LED light.

The MT50-LED-F IP67 is a slim robust LED diffused lit tubular design, this can be suspended horizontally or surface mounted. The svelte tube offers a 180° light distribution through its polycarbonate opal diffuser.

The MT50-LED-F IP67 is an incredibly versatile linear lighting solution.

50mm diameter, (55mm \varnothing end caps) the MT50-LED-F IP67 makes use of efficient LED technology offering switched or DALI Dimming options for a controllable level of light output.

Suitable for almost any interior application.

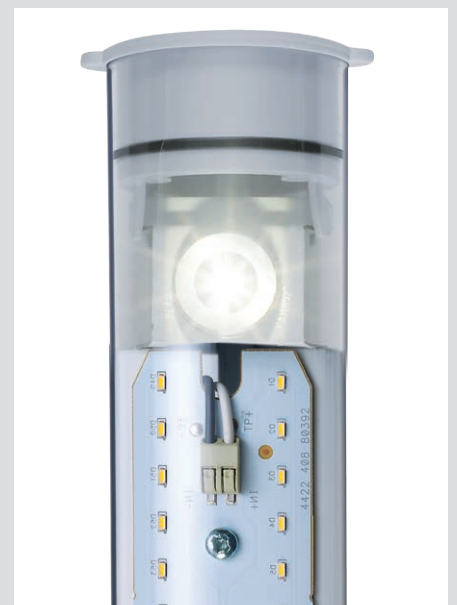

MT50-LED-F IP67

Suspended/Surface

Light source information

LED/Electronic Driver 3000k 4000k
other variants to order please enquire.

Design

Can be suspended horizontally or
surface mounted.

Polycarbonate opal diffuser with IP67
end caps.

IP67 rated as standard.

Dimming

Non-dimmable as standard.

DALI DSI available.

Installation

Two suspension points for fully
adjustable horizontal suspension.

Surface mount.

Optics

Opal diffuser.

Clear diffuser available.

Photometric data available.

Miscellaneous

3hr Emergency with or without DALI
monitoring.

If you would like to change something,
please ask.

Mounting options



Suspension



Plastic clamp



SS clamp



MT50-LED-F IP67 SUSPENDED/SURFACE

PART NR	LENGTH mm	LM/W	CIRCUIT POWER W	LUMEN OUTPUT	CE	230v 50-60 Hz	ta 25°C	Class I
MT50-LED-F1 IP67	695	85.3	12	993	IP67	LED	EEI A	850 GWT
MT50-LED-F2 IP67	1255	95.5	22	2090				
MT50-LED-F3 IP67	1835	99.7	33	3173				
MT50-LED-F4 IP67	2420	100.3	43	4193				

For further information or options, call +44 (0) 1525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk