

MT50-LED T IP67

Suspended/Surface




Tube \varnothing 50mm



Cap \varnothing 55mm



Light output 180°

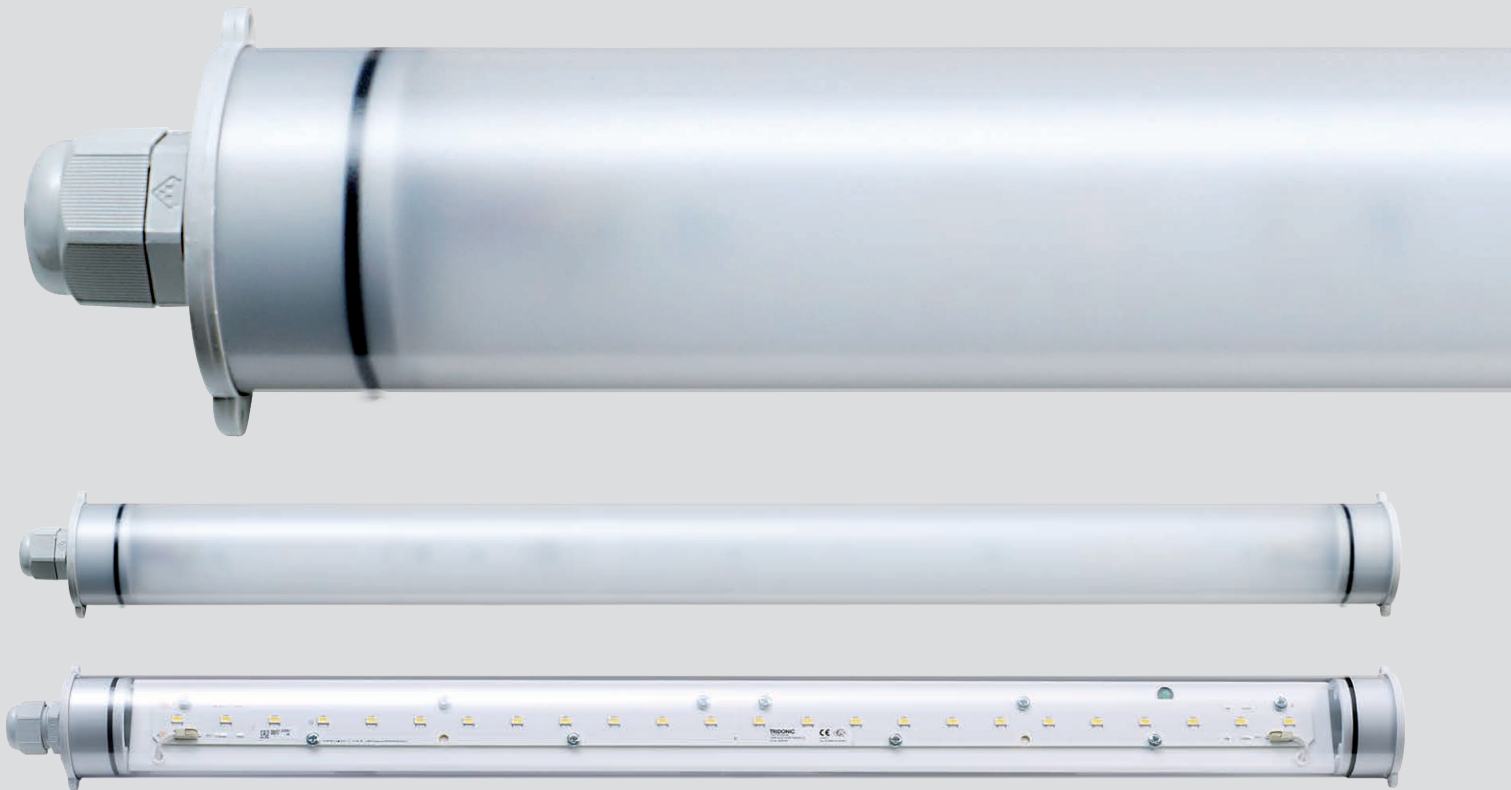

Tubular diffused or clear LED light, black or grey IP67 end caps.

The MT50-LED T IP67 is a slim robust LED diffused lit or clear tubular design, this can be suspended horizontally or surface mounted. The tube offers a 180° light distribution through its polycarbonate diffuser.

The MT50-LED T IP67 is an incredibly versatile linear lighting solution, used both internally and externally.

50mm diameter, (55mm \varnothing end caps) the MT50-LED T IP67 makes use of efficient LED technology offering switched or DALI Dimming options for a controllable level of light output.



MT50-LED T IP67

Suspended/Surface

Light source information

LED/Electronic Driver 3000k 4000k
other variants to order please enquire.

Design

Can be suspended horizontally or surface mounted.

Polycarbonate opal diffuser with IP67 end caps.

Mounting options



Suspension



Plastic clamp



Stainless steel clamp

Dimming

Non-dimmable as standard.

DALI DSI available.

Installation

Two suspension points for fully adjustable horizontal suspension.

Surface Mounting with plastic or stainless steel clips.

Optics

Opal diffuser.

Clear diffuser available.

Photometric data available.

Miscellaneous

3hr Emergency with or without Dali monitoring.


If you would like to change something, please ask.

MT50-LED T IP67

PART NR	LENGTH mm	CLEAR Lm	LUMEN CIRCUIT W	SATIN Lm	LUMEN CIRCUIT W	CIRCUIT POWER W
MT50-LED T2	695-725	1015	91.44	930	83.78	11.1
MT50-LED T3	970-1000	1635	100.93	1485	91.67	16.2
MT50-LED T4	1255-1285	2630	103.00	2230	87.45	23.7
MT50-LED T5	1540-1570	2815	109.00	2255	87.40	25.8
MT50-LED T6	1835-1865	3505	132.00	2765	104.40	26.6

MT50-LED T4 EC 1295-1325

T4 + 40mm for Emergency.

	230v 50Hz
ta 30°C 25°C for EC	Class I
IP67	LED
EEL A	850 GWT

High output

MT50-LED T2-HO	695-725	2020	106.30	1840	102.10	19.0
MT50-LED T3-HO	970-1000	3230	118.30	2990	109.52	27.3
MT50-LED T4-HO	1255-1285	4345	120.70	4495	116.50	36.0
MT50-LED T5-HO	1540-1570	5580	124.00	5220	116.00	45.0
MT50-LED T6-HO	1835-1865	6665	128.00	6350	132.00	51.8

HO Non maintained emergency only please enquire. Please note satin cover will reduce emergency output 20%.

For further information or options, call +44 (0) 1525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk