

Emergency spot light

Maintained and non maintained



ILLUMINATING BY DESIGN




Basic, self test or Dali options

Simple to install with plug in and lock flexible rubber battery connection.

Different lens types included for spot Anti Panic and Escape Route.

5 year driver warranty 3 year battery warranty.



Ceiling void 80mm depth required



Ceiling Hole cut out 40-43mm



Emergency spot light

Maintained and non maintained


Part numbers

- Dali maintained 3hr545
- Dali non maintained 3hr544
- Self test maintained 3hr541
- Self test non maintained 3hr540
- Basic maintained 3hr537
- Basic non maintained 3hr536

Light source

LED 6500k CRI 80 SELV
Change over to EN60598-2-22

Dali Monitoring 230v AC

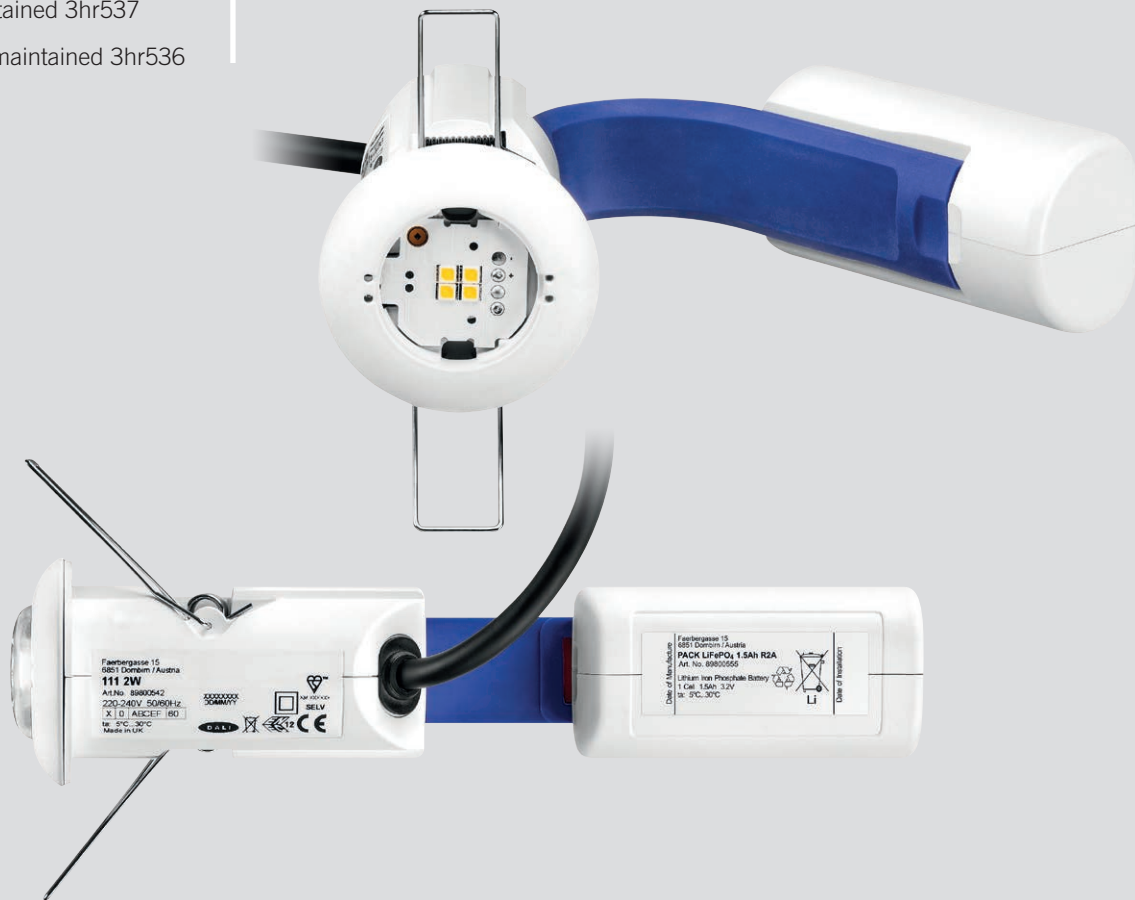

ESCAPE ROUTE 2W 1 LUX

MOUNTING HEIGHT	CENTRE TO END	CENTRE TO CENTRE
2.0m	4.40m	10.00m
2.5m	4.75m	11.65m
3.0m	4.80m	12.75m
3.5m	5.05m	13.45m
4.0m	5.20m	13.60m

ANTI-PANIC 2W 0.5 LUX

MOUNTING HEIGHT	CENTRE TO END	CENTRE TO CENTRE
2.0m	3.45m	9.70m
2.5m	3.80m	10.85m
3.0m	3.75m	11.90m
3.5m	3.80m	12.90m
4.0m	3.70m	13.85m

For further information or options, call +44 (0) 1525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk