


The logo for encapsulite, featuring the word "encapsulite" in a white, lowercase, sans-serif font. Above the text is a graphic of a series of green dots forming a curved, dotted line that suggests a light fixture or a modern architectural element.

encapsulite

MT50 IP67

INTEGRAL ECG



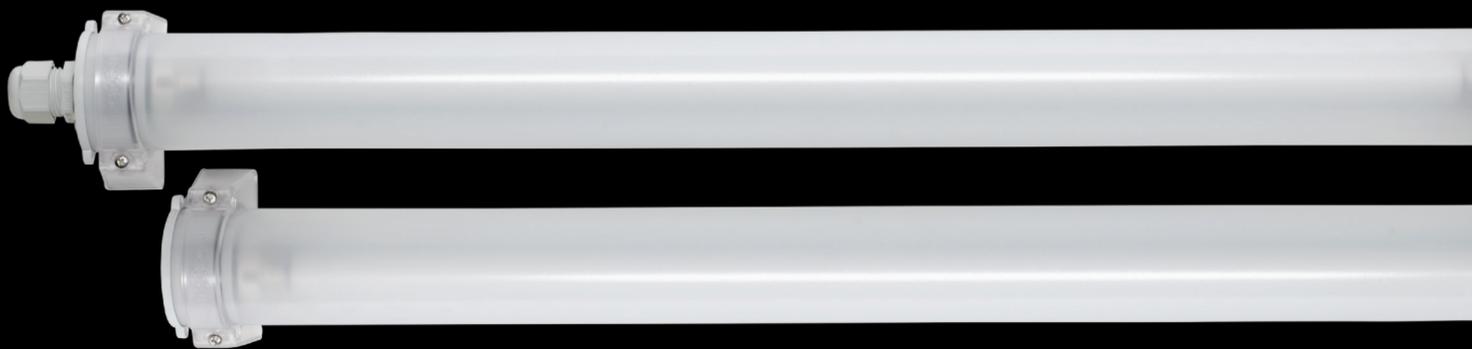

Suspended/Surface mounted. Tubular diffused fluorescent light, with grey or black IP67 end caps.

THE MT50 IP67 IS A SLIM ROBUST DESIGNED FITTING.

Can be used internally or externally. The satin or clear diffusers will enhance any modern space. The light can be suspended horizontally or surface mounted. The cylindrical tube offers a 180° distribution of light through its polycarbonate diffuser.

The MT50 IP67 is an incredibly versatile linear lighting solution which can also be fitted with coloured DDP Sleeves. The fitting makes use of T5 fluorescent lamps, offering switched, Dali or 1-10V Dimming options for a controllable level of light output.

Suitable for external and internal use.

Light Source Information

- T5 fluorescent lamp, integral ballast.
- Available in 3000K, 4000K, 6500K.

Options

- 3hr Emergency with dali monitoring.

Dimming

Dali.

Emergency available from 21W. Through wired and plug & go add 40mm to the length.

Installation

Horizontal, angled suspension or surface mounted.

Optics

Satin or clear polycarbonate diffuser. DDP Sleeves available to create coloured effects.



Black End Cap



Tear Drop Suspension Kit



Plastic & Stainless Steel Clamps

Cat No.	Length (mm)	Lumens Clear	Lumens Satin	Circuit Power (W)
MT50 14W	660	1200	1200	16
MT50 21W	960	1900	1900	23
MT50 28W	1260	2600	2600	30
MT50 35W	1560	3300	3300	37

Not suitable for permanent submersion, do not dim in temperatures below +10°C use LED version.

For further information

Call: +44 (0)1525 376974

Email: reply@encapsulite.co.uk

or visit www.encapsulite.co.uk



Tube ø 50mm



Cap ø 55mm



Light output 180°