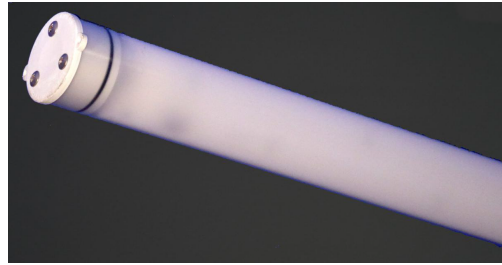


filename : MT50-LED-F3-SC(HE).LDT
 meas. number : 2577
 luminaire number : MT50-LED-F3-SC(HE)
 date / operator : 24-04-2018

**default lamp type(s)**

no of lamps	lamp type	luminaire lumens	input wattage
1	LED MODULE	3670 lm	26.0 W

dimensions

luminaire		luminous area	
length	: 1800 mm	length	: 1540 mm
width	: 50 mm	width	: 46 mm
height	: 50 mm	height	: 25 mm

coordinate system


no of planes	: 7	samples / plane	: 37
first c-plane	: 0.0 °	first gamma-angle	: 0.0 °
step angle	: 15.0 °	step angle	: 5.0 °
last c-plane	: 90.0 °	last gamma-angle	: 180.0 °
symmetrics : symmetry to C0 / C90			

performance

light output ratio : 100.0 %
 DFF : 87.8 %
 UFF : 12.2 %


classification

LiTG / DIN : B31
 UTE : 0.88G+0.12T 0.88H+0.12T
 CIE : 38 67 87 88 100
 BZ : 1 5 5 6 6 6 6 6 6
 Ambient Temperature : 25 degC
 Input Voltage : 240 V
 Circuit Watts : 26.0W
 Amps (running) : 0.118A
 V.A. : 28.26VA
 Power Factor : 0.92
 CCT : 5254K (measured); 5250K (declared)
 CRI (Ra) : 85
 S/P Ratio : 2.0
 Luminaire Lumens : 3670LLm
 Output Current DC : 170mA
 Output Voltage DC : 135.5V
 Output Power : 23.03W
 Luminaire Lm/circ.Watt : 141 LLm/circ.Watt
 Driver Efficiency : 89%
 Driver Details : TRIDONIC LC50 100-400mA FLEXC IPEXC 28000680

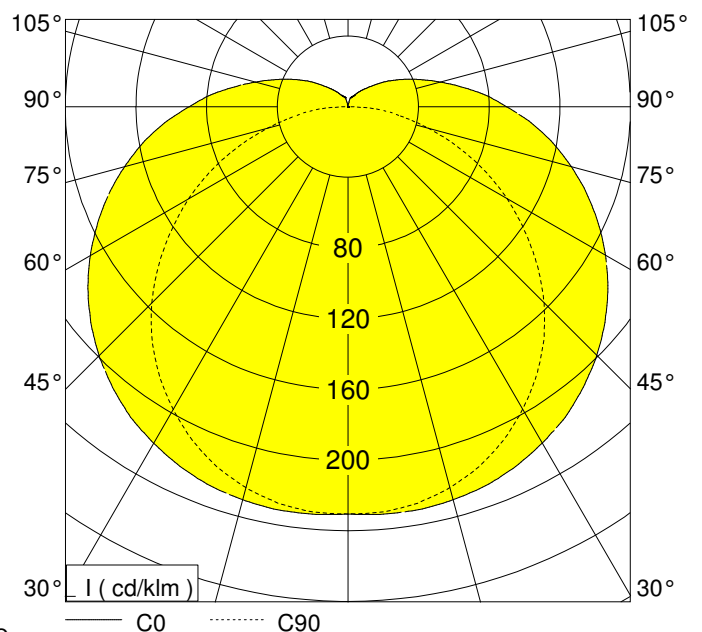

Measurements made are in absolute units. The luminaire is treated as if it was a lamp as it is not possible to measure each LED separately - hence an LOR of 100%

The Light output ratio in real terms would be less than 100%. If it was possible to compare real LED lumens with the total output from the luminaire we could obtain an actual LOR. This also means that the total lumens emitted from the LED's would be greater than the Luminaire Lumens measured. In reality the LED lumens would approximate to this value divided by the actual Light Output.

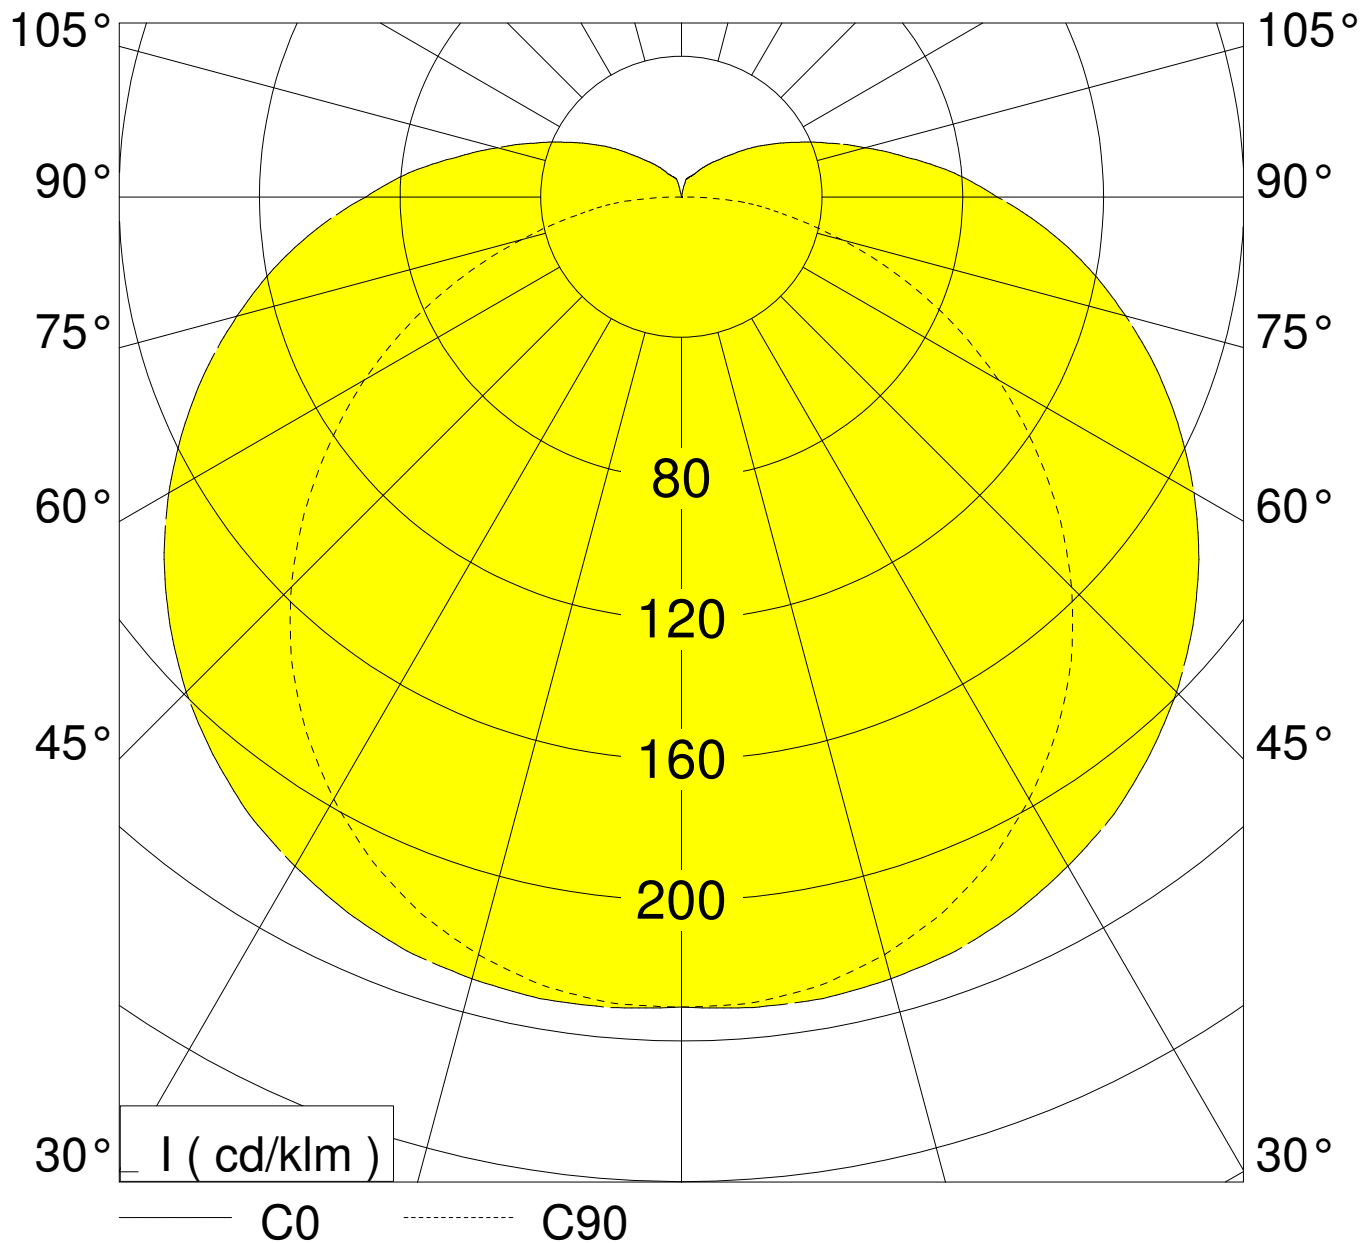

	C 0.0	C 15.0	C 30.0	C 45.0	C 60.0	C 75.0	C 90.0
0.0°	230.20	230.20	230.20	230.20	230.20	230.20	230.20
5.0°	231.20	231.00	230.80	230.60	230.40	230.10	229.90
10.0°	231.30	230.60	230.00	229.30	228.70	228.10	227.50
15.0°	230.00	228.80	227.60	226.30	225.10	224.00	222.90
20.0°	228.00	225.90	224.00	221.80	219.60	218.10	216.60
25.0°	224.40	222.00	219.60	216.20	212.90	210.50	208.10
30.0°	219.60	216.30	213.00	208.60	204.10	200.80	197.60
35.0°	214.20	210.20	206.20	200.20	194.20	190.10	185.80
40.0°	207.00	202.50	197.90	190.20	182.50	177.40	172.30
45.0°	199.00	193.10	187.30	178.30	169.40	163.10	156.80
50.0°	189.70	183.10	176.50	165.90	155.30	147.60	139.90
55.0°	179.50	172.30	165.20	152.70	140.20	131.00	121.90
60.0°	168.20	160.60	153.10	138.90	124.80	114.40	104.00
65.0°	156.20	148.20	140.10	124.10	108.20	96.70	85.20
70.0°	143.80	135.50	127.30	110.20	92.90	79.50	66.00
75.0°	130.70	122.30	114.00	95.80	77.70	62.30	47.10
80.0°	117.70	109.40	101.10	82.50	63.70	47.00	30.30
85.0°	104.00	95.70	87.40	69.10	50.80	34.40	18.00
90.0°	89.70	81.90	73.90	57.60	41.50	20.70	0.00
95.0°	77.90	70.00	62.10	46.90	31.60	15.90	0.00
100.0°	65.00	58.10	51.20	38.00	24.90	12.50	0.00
105.0°	54.10	47.90	41.60	30.10	18.50	9.30	0.00
110.0°	44.70	39.20	33.80	24.20	14.70	7.30	0.00
115.0°	36.80	31.80	26.90	19.00	11.20	5.60	0.00
120.0°	30.10	26.10	22.10	15.60	9.10	4.50	0.00
125.0°	24.40	20.80	17.30	12.50	7.60	3.80	0.00
130.0°	18.90	16.40	13.70	10.20	6.60	3.30	0.00
135.0°	14.90	13.00	11.10	8.60	6.00	3.00	0.00
140.0°	12.20	10.60	9.10	7.40	5.60	2.80	0.00
145.0°	9.80	8.70	7.70	6.50	5.30	2.70	0.00
150.0°	7.60	7.20	6.70	3.40	0.00	0.00	0.00
155.0°	6.60	6.30	6.00	3.00	0.00	0.00	0.00
160.0°	5.90	5.70	5.50	2.80	0.00	0.00	0.00
165.0°	5.20	5.10	5.00	2.50	0.00	0.00	0.00
170.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	cd / klm						

glare rating according to UGR											
ρ -ceiling		70	70	50	50	30	70	70	50	50	30
ρ -walls		50	30	50	30	30	50	30	50	30	30
ρ -workplane		20	20	20	20	20	20	20	20	20	20
room dimensions X Y		viewed crosswise					viewed endwise				
2H	2H	20.1	21.6	20.6	22.0	22.5	19.5	20.9	19.9	21.3	21.8
	3H	22.0	23.3	22.5	23.7	24.2	20.9	22.1	21.3	22.5	23.0
	4H	23.1	24.4	23.6	24.8	25.3	21.6	22.8	22.1	23.3	23.7
	6H	24.2	25.3	24.7	25.8	26.3	22.1	23.3	22.6	23.8	24.3
	8H	24.7	25.9	25.2	26.4	26.9	22.4	23.5	22.9	24.0	24.6
	12H	25.2	26.4	25.8	26.9	27.5	22.6	23.8	23.2	24.3	24.9
4H	2H	20.6	21.8	21.1	22.3	22.7	20.1	21.3	20.5	21.7	22.2
	3H	23.0	24.2	23.6	24.7	25.3	22.0	23.1	22.5	23.7	24.2
	4H	24.4	25.5	24.9	26.1	26.7	22.9	24.1	23.5	24.6	25.2
	6H	25.4	26.3	26.0	26.9	27.5	23.5	24.4	24.0	25.0	25.6
	8H	26.0	26.9	26.6	27.5	28.2	23.8	24.7	24.4	25.3	25.9
	12H	26.7	27.6	27.4	28.3	29.0	24.2	25.0	24.9	25.7	26.5
8H	4H	24.6	25.4	25.2	26.0	26.7	23.3	24.2	23.9	24.8	25.5
	6H	26.2	27.1	26.9	27.8	28.6	24.5	25.3	25.2	26.1	26.9
	8H	27.1	27.9	27.8	28.6	29.5	25.1	25.9	25.8	26.6	27.5
	12H	27.7	28.4	28.5	29.2	30.1	25.3	26.0	26.1	26.8	27.7
12H	4H	24.7	25.6	25.4	26.3	27.0	23.6	24.5	24.3	25.1	25.9
	6H	26.5	27.3	27.2	28.0	28.9	24.8	25.7	25.6	26.4	27.3
	8H	27.2	27.8	27.9	28.6	29.5	25.3	25.9	26.0	26.7	27.6
variation of observer position											
S =	1.0H	+0.1/ -0.1				+0.1/ -0.1					
	1.5H	+0.2/ -0.2				+0.2/ -0.2					
	2.0H	+0.2/ -0.3				+0.2/ -0.4					
standard-table		BK10					BK07				
correction for luminaire		10.9					7.9				
correct glare indices for a total flux of 3670lm											

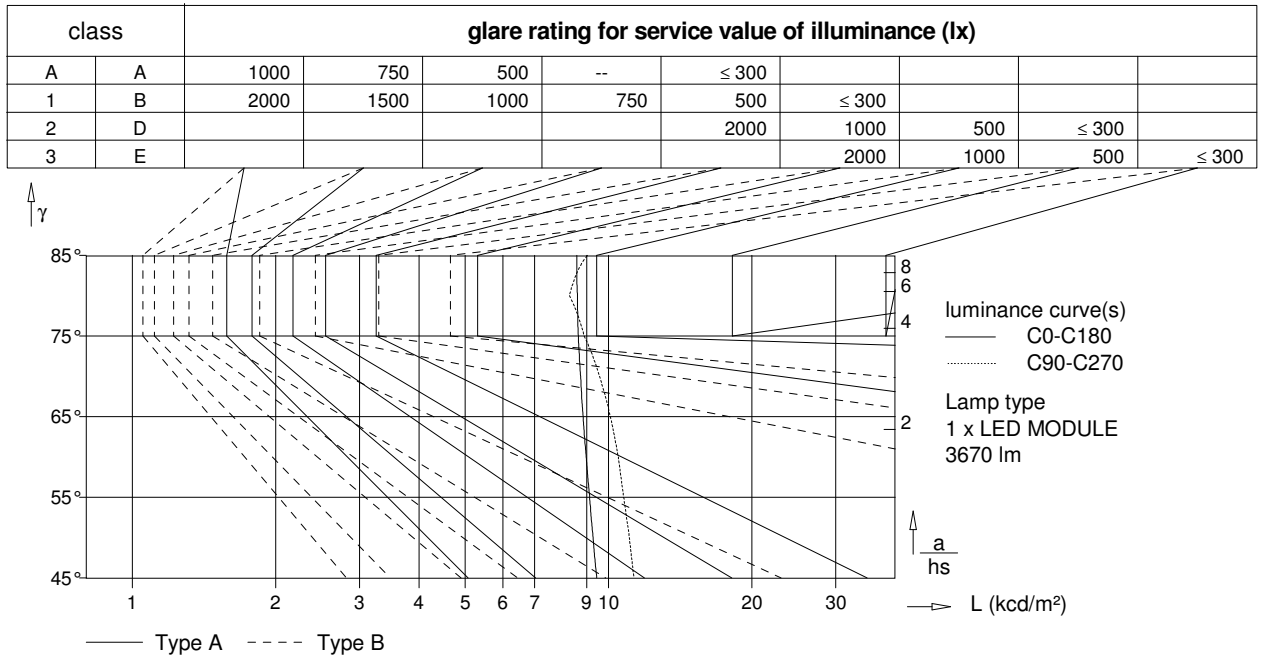


Table of intensities

gamma	C 0	C 90	C 180	C 270
45°	9446.2	11304.6	9446.2	11304.6
50°	9279.2	11061.5	9279.2	11061.5
55°	9128.0	10760.8	9128.0	10760.8
60°	8977.3	10481.1	8977.3	10481.1
65°	8842.3	10092.9	8842.3	10092.9
70°	8736.5	9570.4	8736.5	9570.4
75°	8639.1	8889.3	8639.1	8889.3
80°	8602.0	8277.7	8602.0	8277.7
85°	8571.8	9024.9	8571.8	9024.9

all values in cd/m²

utilization factors / TM5											
reflection			room index								
C	W	F	0.75	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0
70	50	20	N/A	60	67	72	79	84	87	92	95
70	30	20	N/A	52	59	64	72	77	81	87	91
70	10	20	N/A	46	53	58	66	72	76	83	87
50	50	20	N/A	57	63	67	74	78	81	86	89
50	30	20	N/A	50	56	61	68	73	77	82	85
50	10	20	N/A	45	51	56	63	68	72	78	82
30	50	20	N/A	54	59	63	69	73	76	80	83
30	30	20	N/A	48	53	58	64	69	72	77	80
30	10	20	N/A	43	49	54	60	65	69	74	77
0	0	0	N/A	39	44	49	55	59	62	67	70
BZ-class			1	5	5	6	6	6	6	6	6
SHRnom : 1.75						SHRmax : 1.790					

