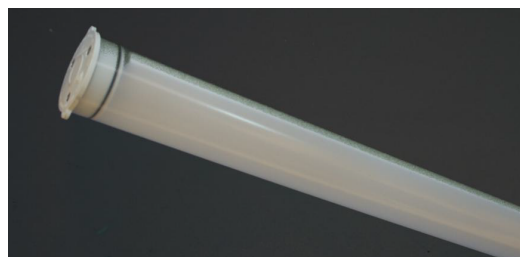


filename : MT70-LED-T7-HE-SC.LDT
 meas. number : 2902
 luminaire number : MT70-LED-T7-HE-SC
 date / operator : 13-03-2019

**default lamp type(s)**

no of lamps	lamp type	luminaire lumens	input wattage
1	LED MODULE	4295 lm	29.5 W

dimensions

luminaire		luminous area	
length	: 2020 mm	length	: 1960 mm
width	: 75 mm	width	: 70 mm
height	: 75 mm	height	: 70 mm

coordinate system


no of planes	: 7	samples / plane	: 37
first c-plane	: 0.0 °	first gamma-angle	: 0.0 °
step angle	: 15.0 °	step angle	: 5.0 °
last c-plane	: 90.0 °	last gamma-angle	: 180.0 °
symmetrics : symmetry to C0 / C90			

performance


light output ratio : 100.0 %
 DFF : 92.3 %
 UFF : 7.7 %

classification

LiTG / DIN : A31
 UTE : 0.92E+0.08T
 CIE : 44 73 91 92 100
 BZ : 5 5 5 5 5 5 5 5
 Ambient Temperature : 25 degC
 Input Voltage : 240 V
 Circuit Watts : 29.5W
 Amps (running) : 0.132A
 V.A. : 31.72VA
 Power Factor : 0.93
 CCT : 3854K (measured): 4000K (declared)
 CRI (Ra) : 87
 S/P Ratio : 1.7
 Luminaire Lumens : 4295LLm
 Output Current DC : 170mA
 Output Voltage DC : 155.2V
 Output Power : 26.38W
 Luminaire Lm/circ.Watt : 146 LLm/circ.Watt
 Driver Efficiency : 89.4%
 Driver Details : TRIDONIC LC 75W 100-400mA
 FLEX C 1P EXC 280000713

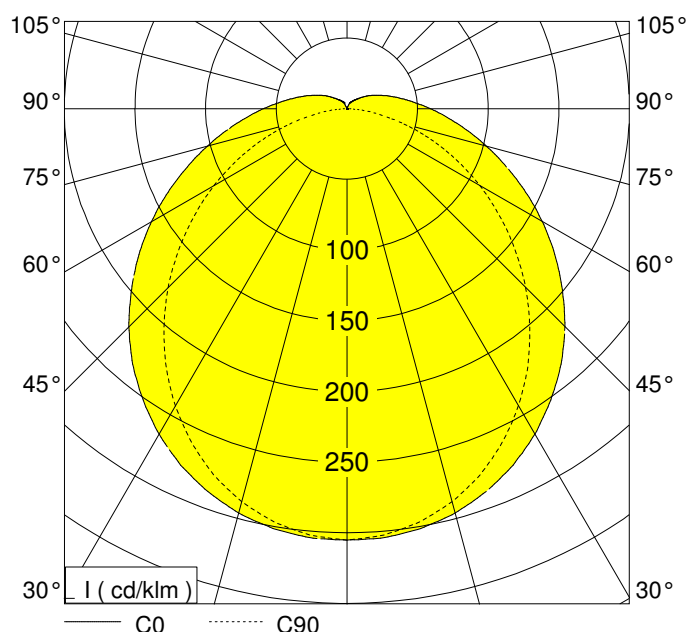

Measurements made are in absolute units. The luminaire is treated as if it was a lamp as it is not possible to measure each LED separately - hence an LOR of 100%
 The Light output ratio in real terms would be less than 100%. If it was possible to compare real LED lumens with the total output from the luminaire we could obtain an actual LOR
 This also means that the total lumens emitted from the LED's would be greater than the Luminaire Lumens measured. In reality the LED lumens would approximate to this value divided by the actual Light Output.

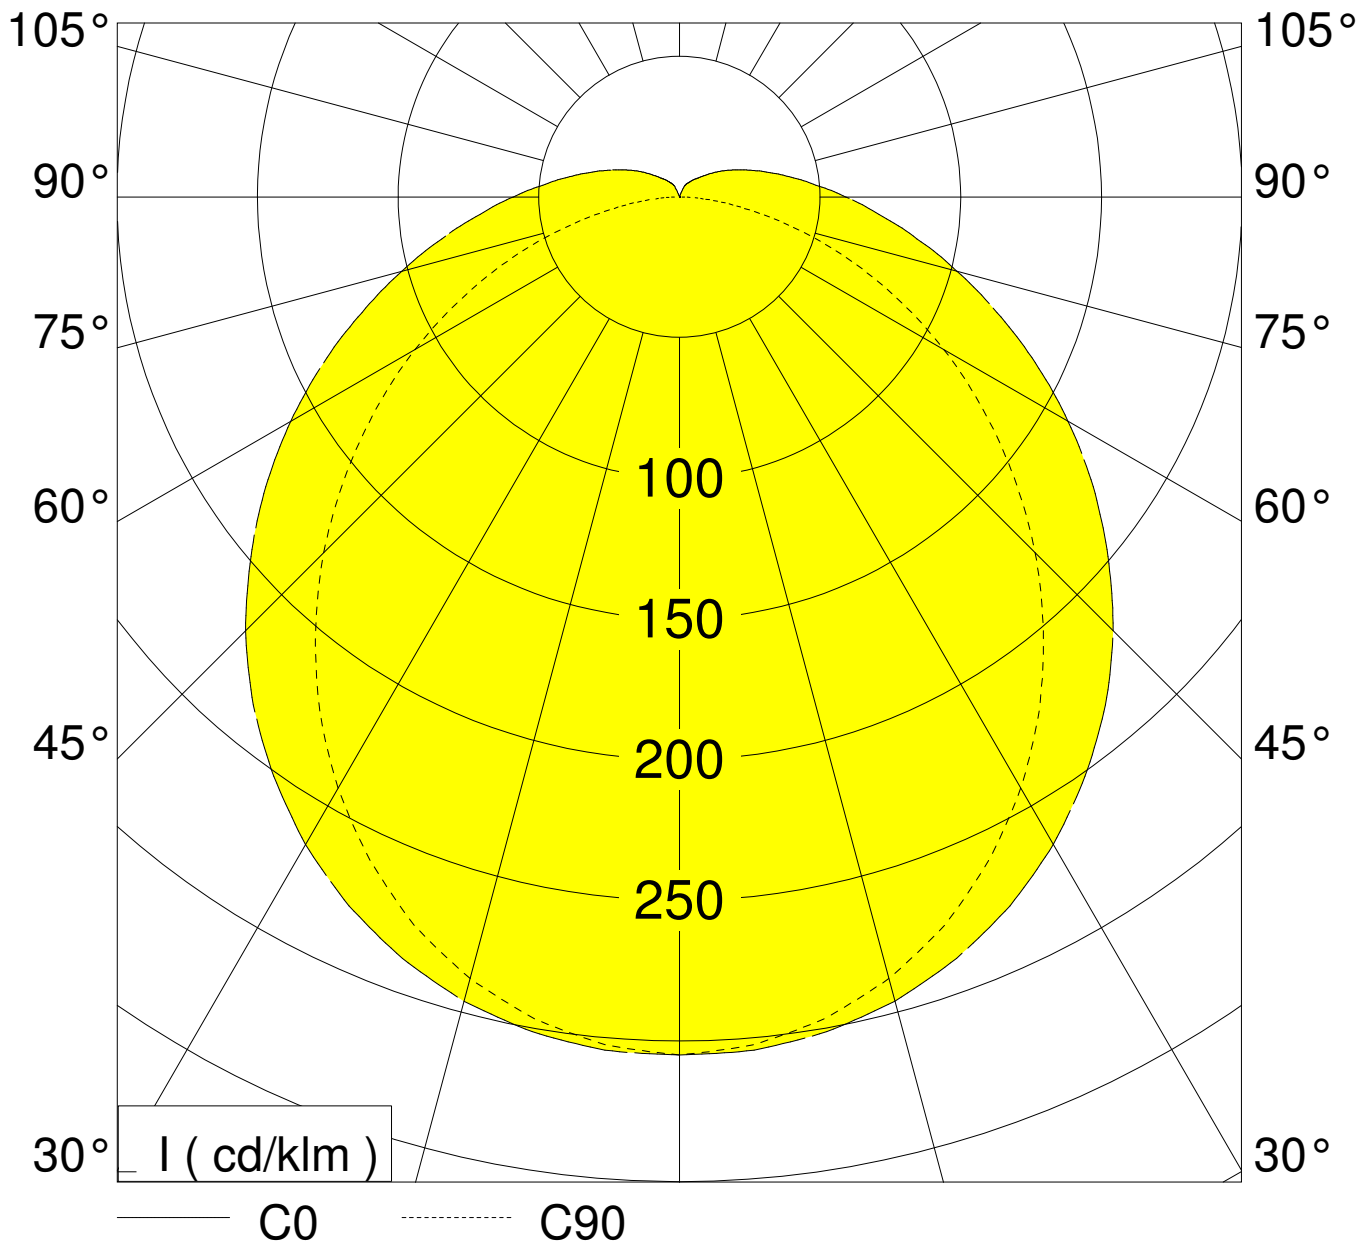

	C 0.0	C 15.0	C 30.0	C 45.0	C 60.0	C 75.0	C 90.0
0.0°	304.70	304.70	304.70	304.70	304.70	304.70	304.70
5.0°	304.20	304.00	303.70	303.10	302.40	302.30	302.30
10.0°	301.10	300.50	299.90	299.30	298.80	297.60	296.40
15.0°	295.70	294.60	293.50	292.10	290.70	289.10	287.40
20.0°	287.80	286.20	284.70	282.20	279.80	277.50	275.30
25.0°	277.80	275.50	273.20	269.80	266.30	263.20	260.00
30.0°	265.60	262.80	260.00	255.10	250.20	246.40	242.50
35.0°	251.20	247.90	244.50	238.30	232.20	227.50	222.80
40.0°	235.50	231.20	227.00	219.40	211.90	206.50	201.10
45.0°	217.90	213.00	208.30	199.30	190.30	184.50	178.70
50.0°	198.70	193.60	188.50	178.40	168.40	161.80	155.20
55.0°	179.40	173.70	167.90	157.30	146.70	139.10	131.60
60.0°	159.40	153.50	147.50	135.80	124.10	116.20	108.50
65.0°	139.50	133.60	127.70	115.40	103.00	94.10	85.20
70.0°	120.00	114.50	108.80	96.10	83.40	73.20	63.10
75.0°	102.10	96.50	91.00	78.20	65.40	53.70	41.90
80.0°	85.70	80.60	75.60	62.80	49.90	36.70	23.50
85.0°	71.10	66.60	61.90	49.40	36.90	23.20	9.40
90.0°	59.10	54.80	50.50	38.70	26.90	13.50	0.00
95.0°	48.70	44.90	41.00	30.30	19.70	9.80	0.00
100.0°	40.30	36.80	33.30	23.80	14.40	7.20	0.00
105.0°	33.40	30.20	27.10	19.10	11.00	5.50	0.00
110.0°	27.60	24.70	21.90	15.20	8.50	4.30	0.00
115.0°	22.80	20.40	18.00	12.30	6.60	3.30	0.00
120.0°	18.80	16.70	14.60	10.00	5.40	2.70	0.00
125.0°	15.20	13.40	11.60	8.20	4.80	2.40	0.00
130.0°	12.00	10.70	9.30	6.80	4.30	2.10	0.00
135.0°	9.60	8.70	7.70	5.70	3.80	1.90	0.00
140.0°	8.10	7.20	6.40	3.20	0.00	0.00	0.00
145.0°	6.60	6.10	5.60	2.80	0.00	0.00	0.00
150.0°	5.60	5.10	4.60	2.30	0.00	0.00	0.00
155.0°	4.40	4.20	4.10	2.00	0.00	0.00	0.00
160.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180.0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	cd / klm						

glare rating according to UGR											
ρ-ceiling		70	70	50	50	30	70	70	50	50	30
ρ-walls		50	30	50	30	30	50	30	50	30	30
ρ-workplane		20	20	20	20	20	20	20	20	20	20
room dimensions X Y		viewed crosswise					viewed endwise				
2H	2H	17.4	18.9	17.8	19.2	19.6	17.6	19.1	18.0	19.4	19.8
	3H	18.6	19.8	19.0	20.1	20.4	18.6	19.8	19.0	20.1	20.4
	4H	19.4	20.5	19.8	20.9	21.2	19.1	20.3	19.5	20.7	21.0
	6H	20.0	21.1	20.5	21.5	21.9	19.5	20.6	19.9	21.0	21.4
	8H	20.4	21.5	20.8	21.9	22.3	19.7	20.7	20.1	21.1	21.6
	12H	20.7	21.8	21.2	22.2	22.6	19.8	20.8	20.2	21.3	21.7
4H	2H	17.7	18.8	18.1	19.2	19.5	17.8	19.0	18.2	19.3	19.7
	3H	19.5	20.6	20.0	21.0	21.5	19.4	20.5	19.9	20.9	21.4
	4H	20.5	21.6	21.0	22.0	22.5	20.2	21.3	20.7	21.7	22.2
	6H	21.1	22.0	21.6	22.5	23.0	20.5	21.4	21.0	21.8	22.3
	8H	21.6	22.4	22.1	22.9	23.4	20.7	21.5	21.2	22.0	22.6
	12H	22.1	22.9	22.7	23.4	24.1	20.9	21.8	21.5	22.3	22.9
8H	4H	20.6	21.5	21.2	22.0	22.5	20.3	21.2	20.9	21.7	22.2
	6H	21.9	22.7	22.5	23.3	23.9	21.2	22.0	21.9	22.6	23.3
	8H	22.5	23.3	23.2	23.9	24.6	21.6	22.4	22.3	23.0	23.7
	12H	22.9	23.6	23.6	24.2	24.9	21.7	22.3	22.4	23.0	23.7
12H	4H	20.8	21.6	21.4	22.2	22.8	20.6	21.4	21.1	21.9	22.5
	6H	22.1	22.8	22.7	23.5	24.2	21.5	22.2	22.1	22.9	23.6
	8H	22.6	23.2	23.2	23.8	24.6	21.7	22.3	22.3	23.0	23.7
variation of observer position											
S =	1.0H	+0.1/ -0.1				+0.1/ -0.1					
	1.5H	+0.2/ -0.3				+0.2/ -0.3					
	2.0H	+0.3/ -0.5				+0.5/ -0.6					
standard-table		BK07					BK05				
correction for luminaire		5.5					4.0				
correct glare indices for a total flux of 4295lm											

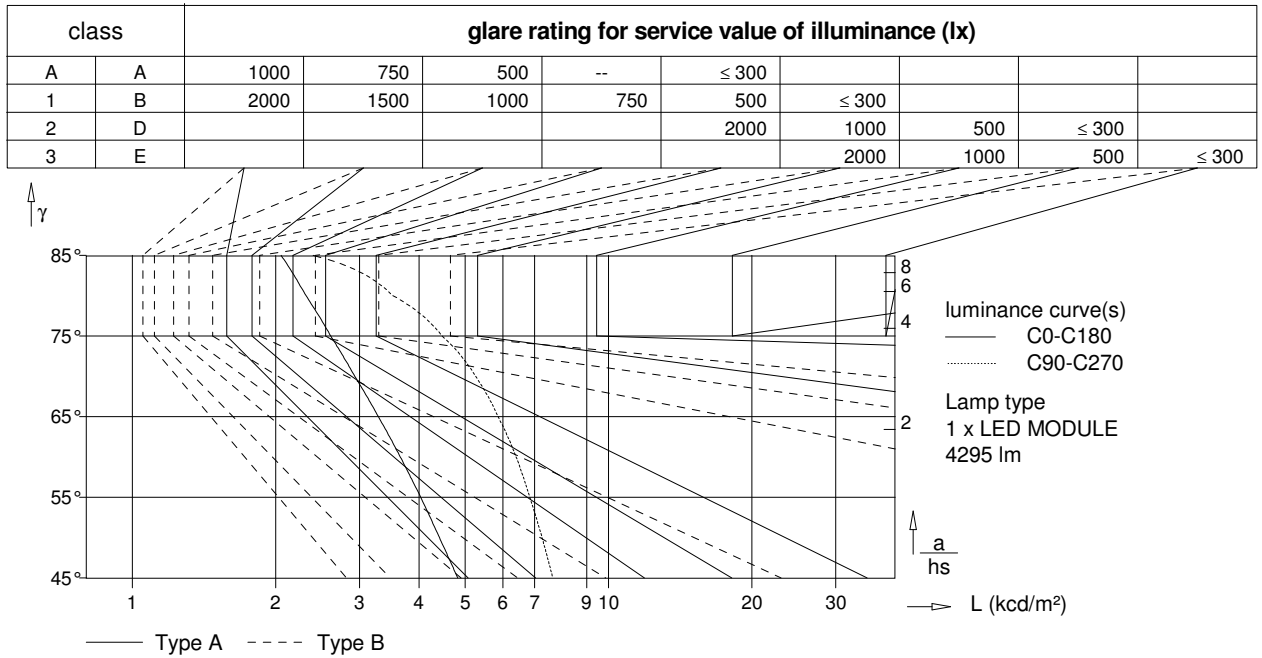


Table of intensities

gamma	C 0	C 90	C 180	C 270
45°	4823.4	7638.5	4823.4	7638.5
50°	4415.2	7249.9	4415.2	7249.9
55°	4032.4	6833.9	4032.4	6833.9
60°	3652.9	6397.4	3652.9	6397.4
65°	3286.1	5862.1	3286.1	5862.1
70°	2930.9	5259.4	2930.9	5259.4
75°	2609.7	4471.8	2609.7	4471.8
80°	2315.8	3522.9	2315.8	3522.9
85°	2054.5	2397.6	2054.5	2397.6

all values in cd/m²

utilization factors / TM5											
reflection			room index								
C	W	F	0.75	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0
70	50	20	56	64	71	76	83	88	91	96	99
70	30	20	48	56	63	69	76	82	86	91	94
70	10	20	43	50	57	63	71	77	81	87	91
50	50	20	53	61	67	72	78	83	86	90	93
50	30	20	47	54	61	66	73	78	81	86	90
50	10	20	42	49	56	61	68	74	78	83	87
30	50	20	51	58	64	68	74	78	81	85	88
30	30	20	45	52	59	63	70	74	78	82	85
30	10	20	41	48	54	59	66	71	74	79	83
0	0	0	38	44	51	55	61	66	69	73	76
BZ-class			5	5	5	5	5	5	5	5	5
SHRnom : 1.50						SHRmax : 1.619					

