





24V RD TWIN STICK LED

REMOTE DRIVER

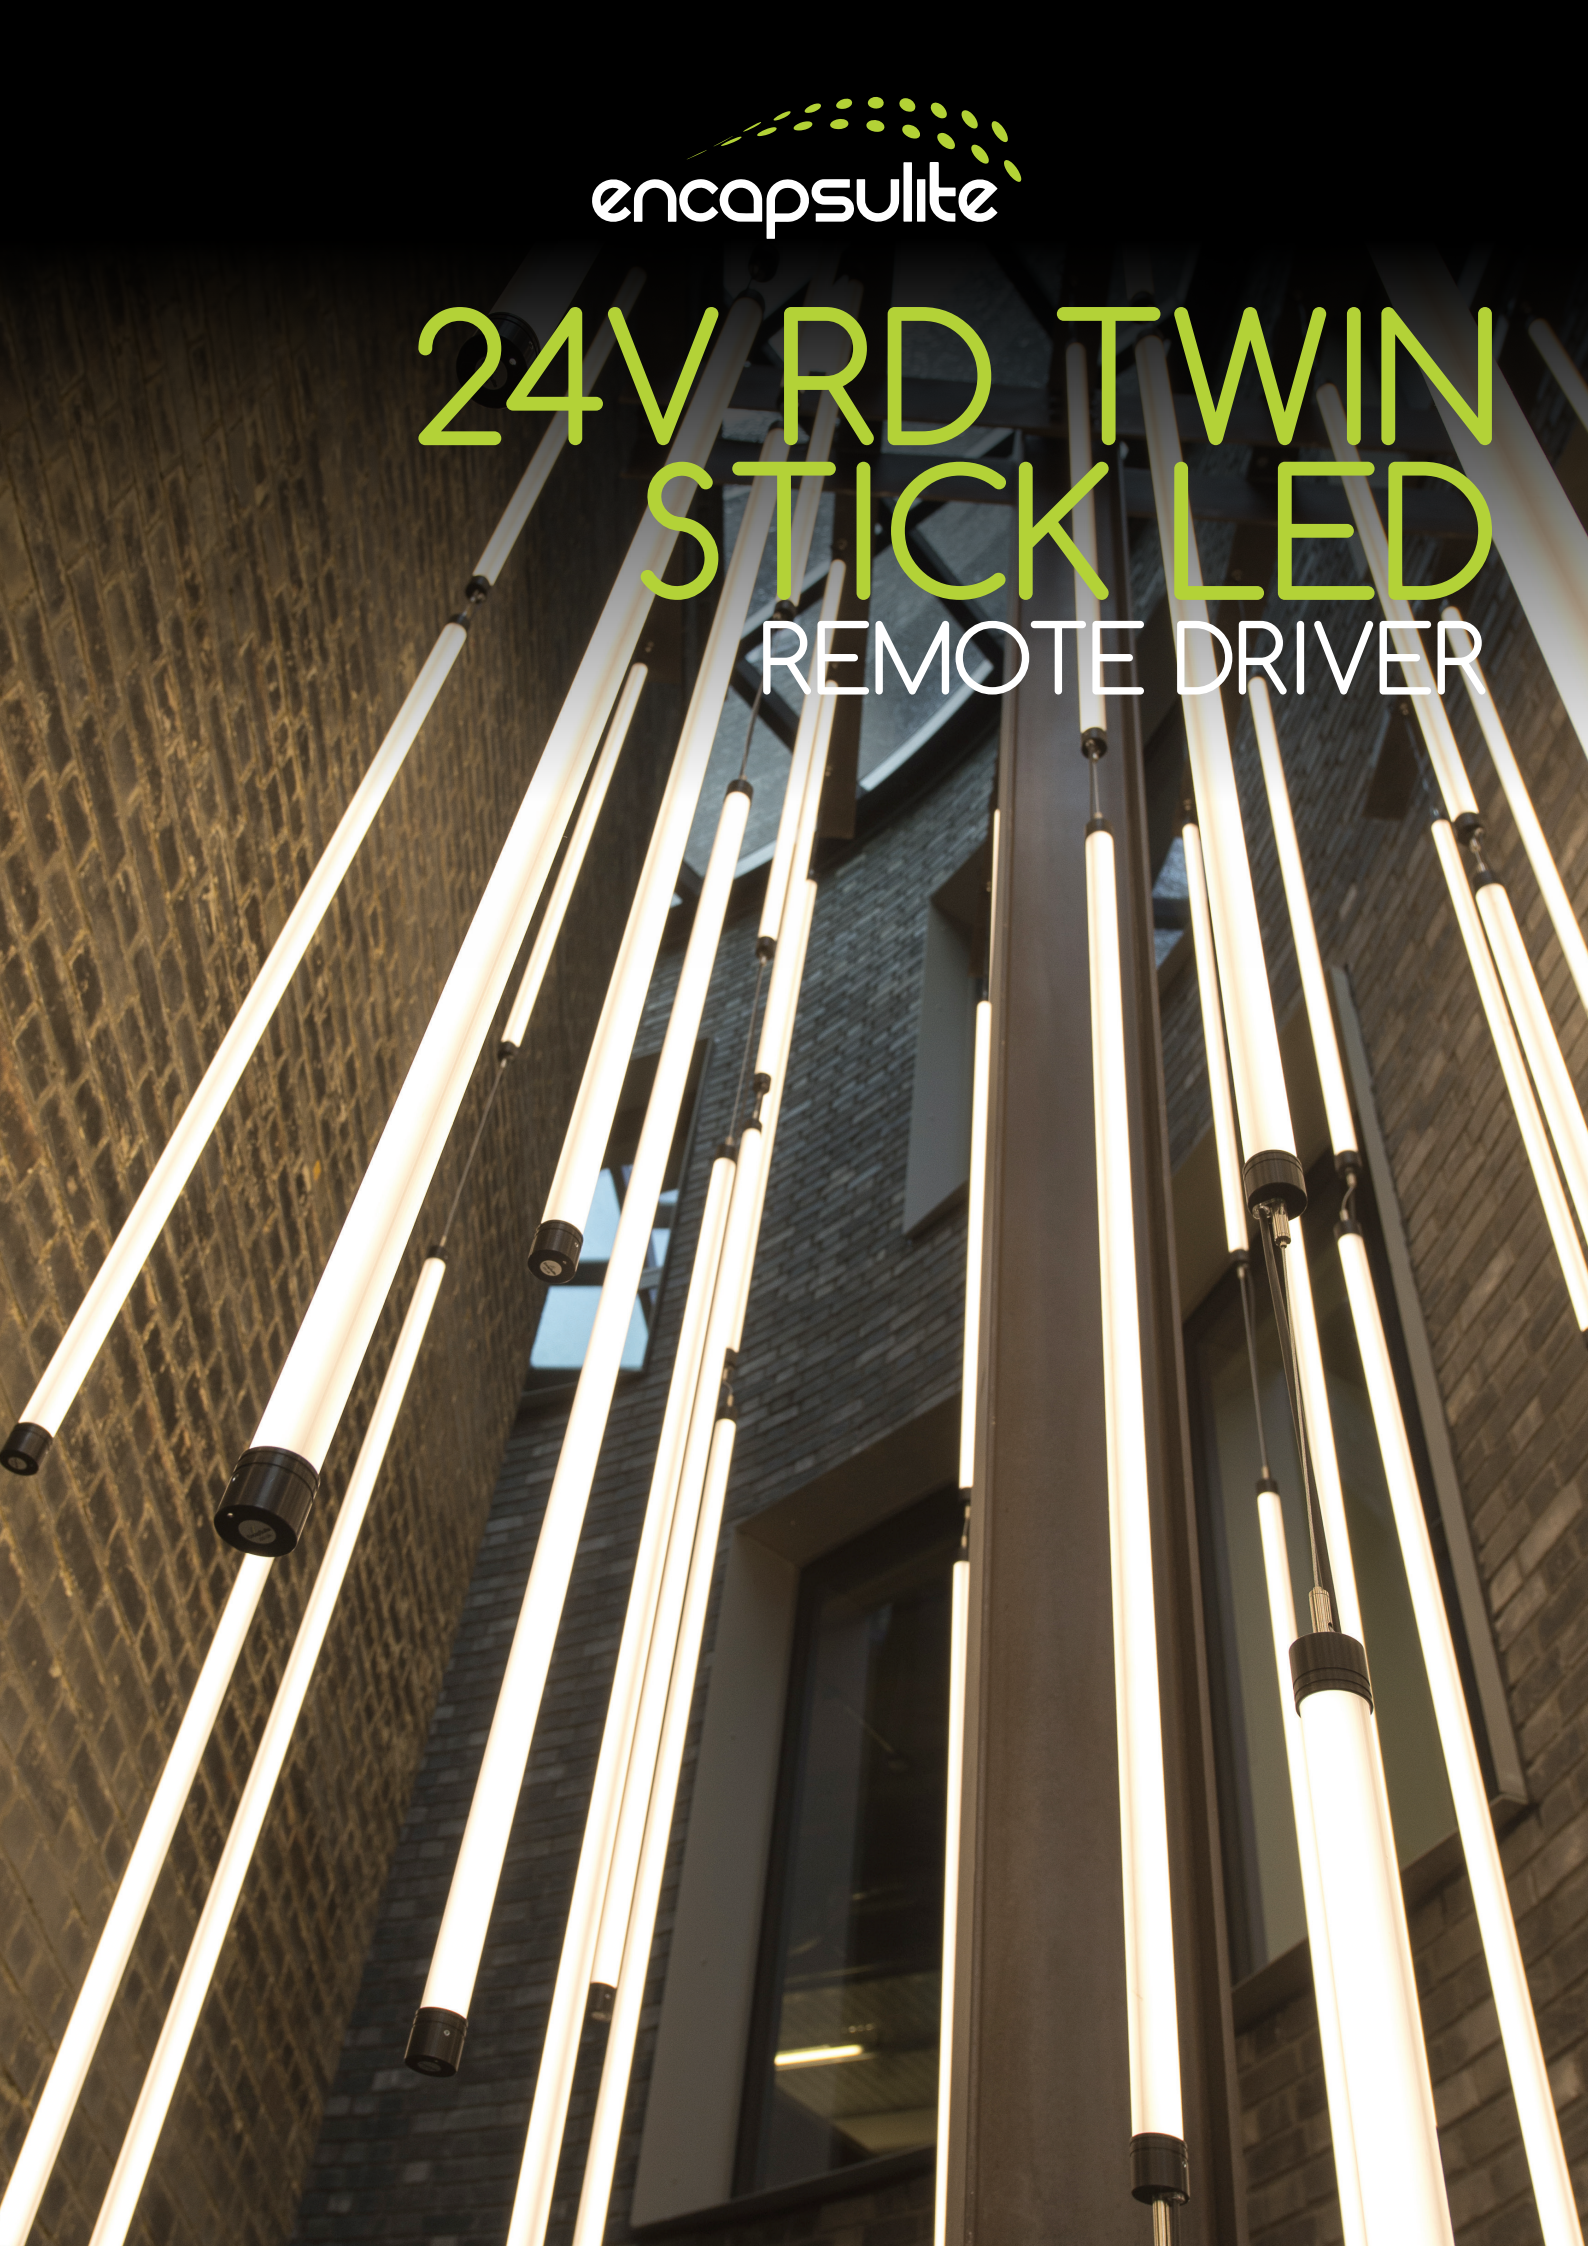

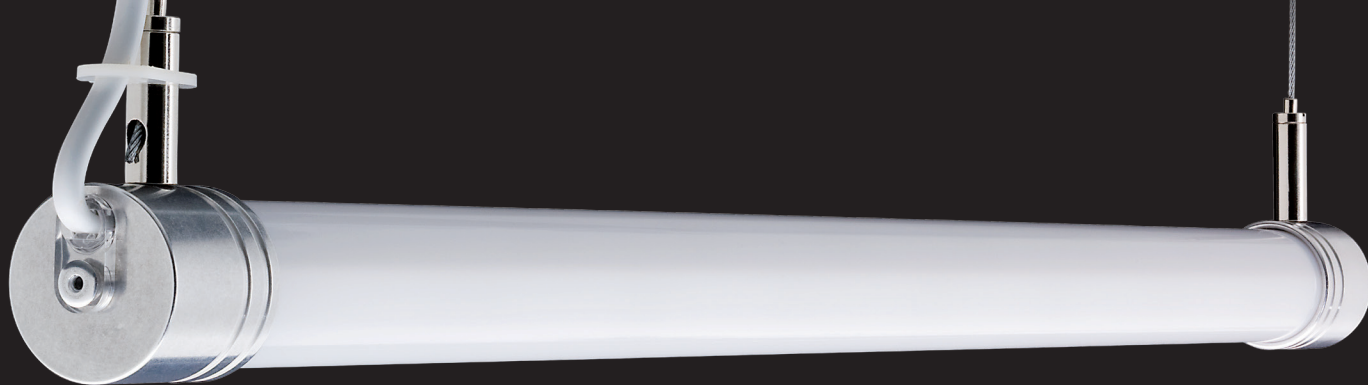

Suspended/Surface mounted. Tubular diffused LED light, with aluminium end caps.

A ROBUST, SLIM LED DIFFUSED CYLINDRICAL TUBE.

The 24V RD Twin Stick is a robust, slim LED diffused cylindrical tube with the latest LED chips creating a cleaner 360° light output. The fitting can be suspended horizontally, vertically or at any angle, as well as surface mounted. Ideal as a creative feature luminaire which can incorporate many colours with the use of our coloured sleeves. Regularly used in Theatre, TV, retail, events companies, entertainment industries and for feature lighting.

The 24V RD Twin Stick will operate from a 24V constant voltage driver and can be dimmable.

Suitable for almost any dry interior application.

Light Source Information

- LED/Electronic Driver.
- Available in 2700K, 3000K & 4000K.

Options

- Aluminium end caps as standard.
- Anodised end caps available in many more colours including black, gold, rose gold and brass (see right).

Driver

A remote driver is required to run these fittings.

Dimming

100W Dali, 100W 1-10V, 60W Leading/trailing edge.

Installation

Horizontal, vertical and angled suspension, surface mounted.

Optics

Satin polycarbonate diffuser.



Available End Cap colours



Suspension Kit & Polycarbonate Clips



Discreet Rear Mount and Side Entry Cable

Cat No.	Length (mm)	Illuminated Length (mm)	Lumens	Circuit Power (W)
24V RD TS 5	525	455	610	11
24V RD TS 10	1025	960	1380	19
24V RD TS 15	1525	1460	2015	27

Drivers available: 30W, 75W, 100W/Dali, 100W 1-10V, 60W leading/trailing edge. When using 100W driver you can run the following:

Length	Wired back to Driver	Wired end to end
525	X8	X5
1025	X5	X4
1525	X3	X3

Total fitting wattage must not exceed driver wattage.
Max cable length from driver to light is 10m.



For further information

Call: +44 (0)1525 376974

Email: reply@encapsulite.co.uk

or visit www.encapsulite.co.uk



Tube ø 30mm



Cap ø 33mm



Light output 360°