

# MT-IK10 IP67

Impact resistant / Waterproof

**encapsulite**


ILLUMINATING BY DESIGN



H55mm x W57mm



Light output 180°

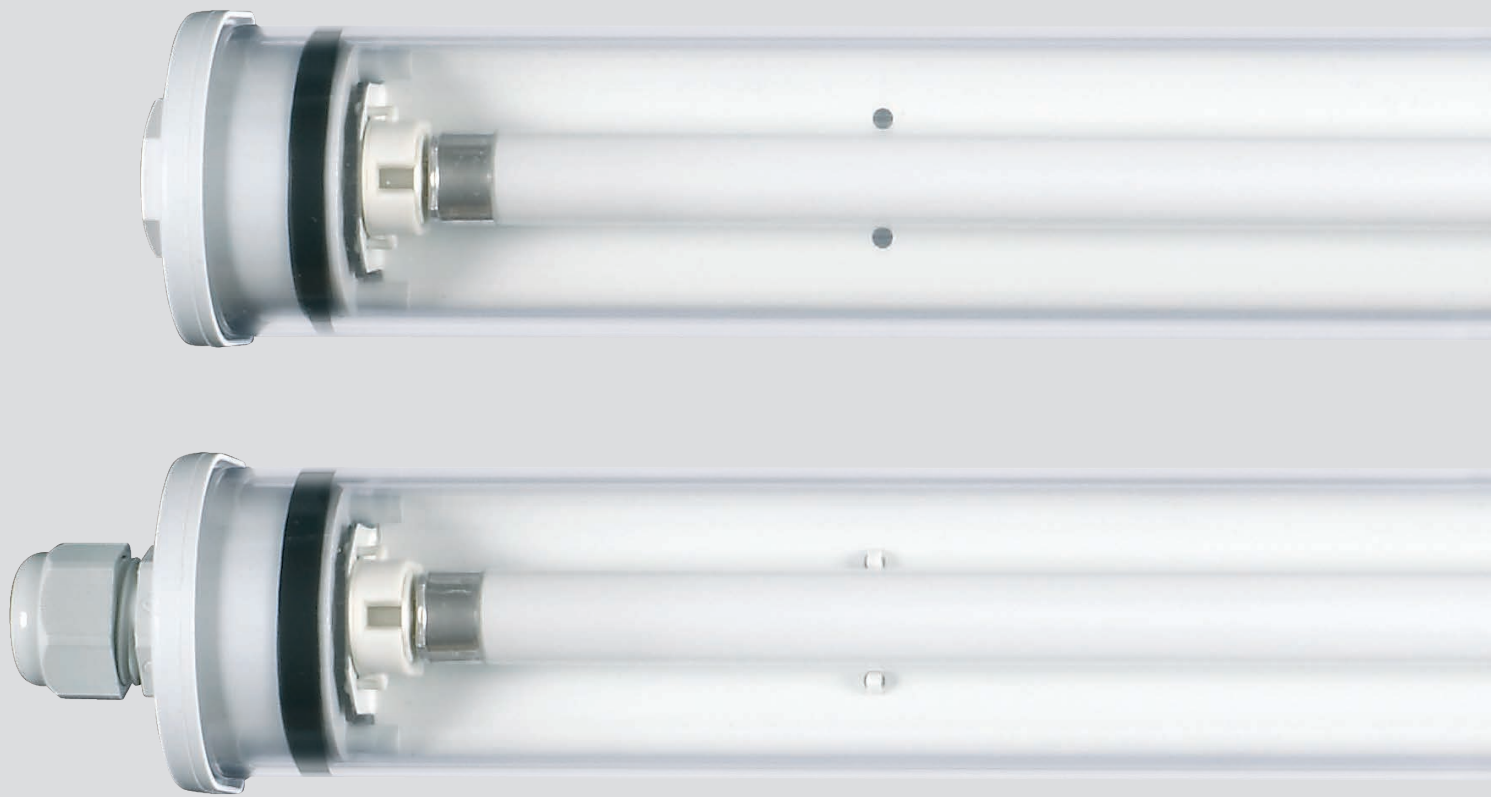

## Linear diffused fluorescent light.

The MT-IK10 IP67 is a slim D shaped lit tubular design that can be surface mounted with stainless steel clamps. This light offers a 180° light distribution through its polycarbonate opal diffuser.

The MT-IK10 IP67 is an incredibly strong linear lighting solution with a wall thickness of 3mm.

55mm High x 57mm wide the MT-IK10 IP67 offers switched or DALI dimming options for a controllable level of light output.



# MT-IK10 IP67

Impact resistant / Waterproof

## Light source information

Fluorescent/Electronic Ballast 3000k, 4000k and 5000k.

## Design

Surface mounted.

IP67 rated as standard.

## Installation

Surface mounting with clamps.

## Dimming

Non-dimmable as standard.

DALI available. +10° for dimming

## Optics

Opal/clear diffuser.

Photometric data available.

## Miscellaneous

3hr Emergency with or without DALI monitoring HE only.

If you would like to change something, please ask.









## Mounting options



Stainless steel mounting bracket cost option

## MT-IK10 IP67 SURFACE

PART NR	LENGTH mm	WATTAGE	LOR	Lm/W	CIRCUIT POWER W
<b>Clear cover</b>					
MT-IK10 8w	403-433	8w	90	44.0	11
MT-IK10 14w	660-690	14w	100	62.7	15.9
MT-IK10 21w	960-990	21w	100	68.6	23
MT-IK10 28w	1260-1290	28w	100	70.1	30
MT-IK10 35w	1560-1590	35w	99	72.0	38
MT-IK10 21w-LED EC	1000-1030	21w	100	68.6	26.5
MT-IK10 28w-LED EC	1300-1330	28w	100	70.1	33.5
<b>Satin cover</b>					
MT-IK10 8w SC	403-433	8w	82	36.2	11
MT-IK10 14w SC	660-690	14w	92	53.6	15.5
MT-IK10 21w SC	960-990	21w	91	58.8	23
MT-IK10 28w SC	1260-1290	28w	97	60.3	30
MT-IK10 35w SC	1560-1590	35w	91	60.7	38
MT-IK10 21w SC LED-EC	1000-1030	21w	91	58.8	26.5
MT-IK10 28w SC LED-EC	1300-1330	28w	97	60.3	33.5

For further information or options, call +44 (0) 1525 376974,  
email [reply@encapsulite.co.uk](mailto:reply@encapsulite.co.uk) or visit [www.encapsulite.co.uk](http://www.encapsulite.co.uk)