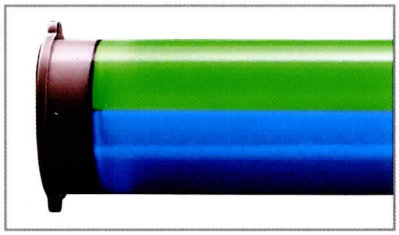

MT360 IP67
Waterproof Lighting

Specification

Outer case	Polycarbonate
Reflector	White pre coat steel
Lamp holder	T5 G5
Includes	Col 840 lamp, mounting brackets
Energy efficiency	A2
Options	Thru wired Plug & Go Stainless steel mounting clips DDP coloured sleeves Suspension kit Black end caps Dimmable +10C only

CE | 230v 50Hz

IP67 | Class I

F | T5 G5

EEI A2 | 850 GWT

TUBE Ø70mm | CAP Ø75mm

Clear cover

PART NR	WATTAGE	LENGTH	CIRCUIT POWER W
MT360 14w	14w	665	31
MT360 21w	21w	965	45
MT360 28w	28w	1265	60
MT360 35w	35w	1565	75

Satin cover

PART NR	WATTAGE	LENGTH	CIRCUIT POWER W
MT360 14w SC	14w	665	31
MT360 21w SC	21w	965	45
MT360 28w SC	28w	1265	60
MT360 35w SC	35w	1565	75

Add 1-10v DALI or DSI to product code for dimmable option +10C only.

Add ST Standard, TW Thru wired, or P&G plug and go.
TW and P&G are 30mm longer.



Need something changed to suit your project? *If we can, we will. Please ask!*



Alternative clip

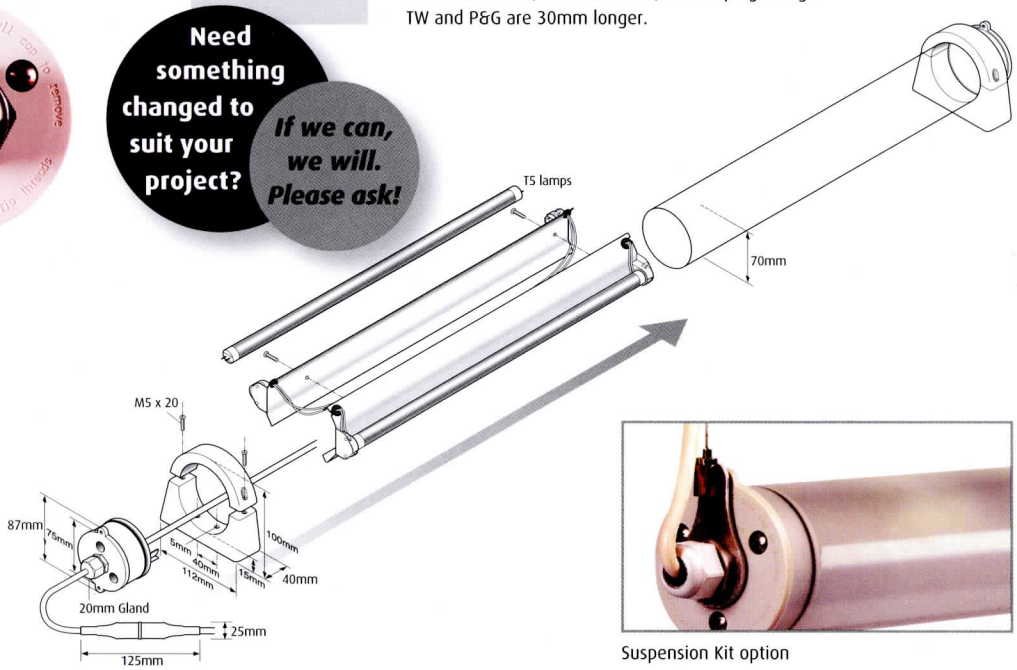

Suspension Kit option

PRODUCT CODE	14W	21W	28W	35W
MT70-360 Single switched = Both lamps switched separately	✗	✓	✓	✓
MT360 Twin switched = Both lamps switched together	✓	✓	✓	✓
MT360 DALI Twin = Both lamps controlled together	✓	✓	✓	✓
MT360 DALI Single = Each lamp controlled separately	✗	✗	✓	✓
Overall length including cable gland one end mm	665	965	1265	1565

No HO Option.

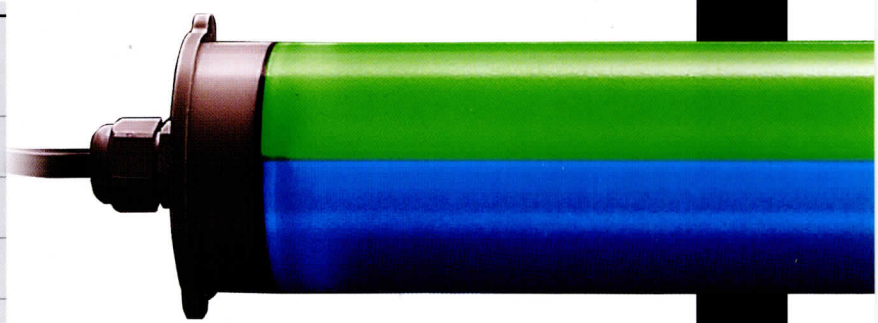

Please Note: Do not use or clean with chemicals.
Not for use submerged in water.

Please call for further information or options on **01525 376974** or email **reply@encapsulite.co.uk**