


Report Number	GNC-31166
Customer	Encapsulite International Ltd
Contact	Jordan Waumsley
Product Type	ECO LED Stick-Lite
Test Purpose	Generation of photometric data
Quote Reference	Q-LUX-301840
Works Order Number	WO-31166
LAB Test Method Reference	Goniometric (Type C) Intensity Scan - IES/LDT Files & Report - Scan Increments 15 degrees Azimuth by 2.5 degrees Inclination
Test Standards	LM-79-19; (BS) EN 13032-4:2015 + A1 2019; CIE S025:2015
Lab Location Reference	LUX-TSI
Tested by	Andrew Boon
Date of Test	14-06-22
Reviewed by	Gareth Jones
Number of products tested	1

Address: LUX-TSI Ltd.,
Pencoed Technology Park,
Pencoed, Bridgend,
CF35 5AQ, UK
Telephone: +44 (0) 1656 864618
Authorised by: G. Jones
Email: CustomerService@lux-tsi.com
Signed:




ECO-LED Stick-Lite 2ft

Date: 15/06/2022

Disclaimers

This report is for the exclusive use of LUX-TSI's Customer and is provided pursuant to the agreement between LUX-TSI and its Customer. LUX-TSI's responsibility and reliability are limited to the Terms and Conditions of the agreement. LUX-TSI assumes no liability to any other party, other than the Customer in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Customer is authorised to permit copying or distribution of this report and then only in its entirety. Any use of the LUX-TSI name or one of its marks for the sale or advertisement of the tested material, product or service must be approved in writing by LUX-TSI.

The observations and test results in this report are relevant only to the sample tested. The sample was tested as supplied by LUX-TSI's customer and not selected by LUX-TSI. This report does not remove the requirement for the Customer to obtain further independent advice and in particular to instruct a notified or competent body or person to carry out further evaluation work and/or testing. Accordingly, no warranty is given, nor is any term or condition to be implied, that the product, which is the subject of this report, complies with the requirements of any EU directives. Opinions and interpretations are outside the scope of this report.

TRCL_GC_R17

Nomenclature

Lamp Orientation described below relates to the position in which a lamp is designed to operate for maximum performance and safety, these include:

BD - Base Down (bulb is vertically positioned with the metal base at the bottom, glass up)

BU - Base Up (bulb is vertically positioned with the metal base at the top, glass hanging down)

HBD - Horizontal $+15^{\circ}$ to Base Down

H45 - Horizontal to -45° only

VBV - Vertical Base Up $\pm 15^{\circ}$

VBD - Vertical Base Down $\pm 15^{\circ}$

HBU - Base Up $\pm 90^{\circ}$ (bulb can be operated in a base up or horizontal position)

HOR - Horizontal Burn (bulb is positioned with the metal base parallel to the ground)

H75 - Horizontal $\pm 75^{\circ}$ (bulb should not be operated within 15° of vertical)

U - Universal Burn (burn can be operated in any position)

Test Conditions

Measurements were made with an ambient temperature of $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. Measurements were taken only after sufficient time for thermal stabilisation has been allowed. Thermal stabilisation according to LM-79-19 was achieved before measurements are measured and reported.

Calibrations

The far field Type C Goniophotometer is calibrated using an intensity lamp calibrated by a NVLAP accredited calibration laboratory.

Test Equipment

UL LSI Custom Far-Field Type C Moving Mirror Goniophotometer measures intensity as a function of angle. On-axis spectral measurements taken using spectrometer, for which these measurements and outputs are not accredited.


Data Formats

IES (15 deg azimuth and 2.5 deg inclination) and LDT (15 deg C planes and 2.5 deg gamma angles)

Spectral Data file from which the calculation of chromaticity and CRI etc. have been performed and the derived results from the LightMtrX software are provided as a text file format.

All photometric data for LED products will be provided in ABSOLUTE photometric format and all non-LED data will be in relative photometric format with lamp lumens measured separately, where possible, for LOR estimation.

Product Name	ECO-LED Stick-Lite 2ft
Part/Serial Number	N/A
Type of Product	ECO LED Stick-Lite
Base Type	Not Applicable - Luminaire
Driver Type	Internal
Test Time	14 mins
Operating Orientation	Horizontal
Test Orientation	Horizontal
Ambient Temperature	24.9°C
Manufacturer	Encapsulite International Ltd
Date of Manufacture	N/A
Thermal Management	Passive
Dimmable	Unknown
Pre-Burning Time	0 hours
Stabilisation Time	30 mins
Humidity	52.1% RH
Averaging Applied	NONE

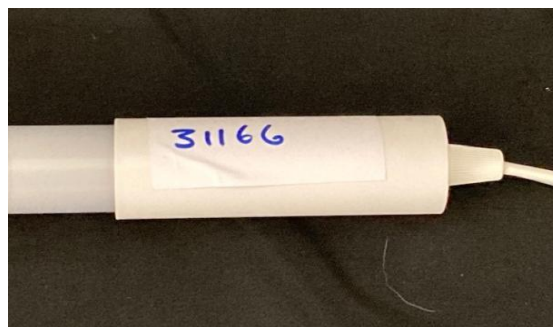

Driver Details		
Manufacturer	Philips	
Model	N/A	
Part/Serial #	N/A	
Rated Voltage	220-240V	
Output	Current	N/A
	Voltage	N/A

Photometric Measurements	
Luminous Flux	708 lm
Luminous Efficacy	87 lm/W


Dimension	Sample	Luminous Opening
Diameter/Width	35 mm	30 mm
Length	650 mm	495 mm
Height/Depth	35 mm	30 mm

Electrical Measurements	
Frequency	50 Hz
Voltage	230.2 V
Current	0.037 A
Power	8.1 W
Power Factor	0.958
Apparent Power	8.4 VA

Goniophotometric Measurements

Beam Angle	Horizontal	180°
	Vertical	105°
On-axis Intensity		109 cd
Peak Intensity		110 cd
Peak Direction	Horizontal	120°
	Vertical	8°

Polar Plot (cd)

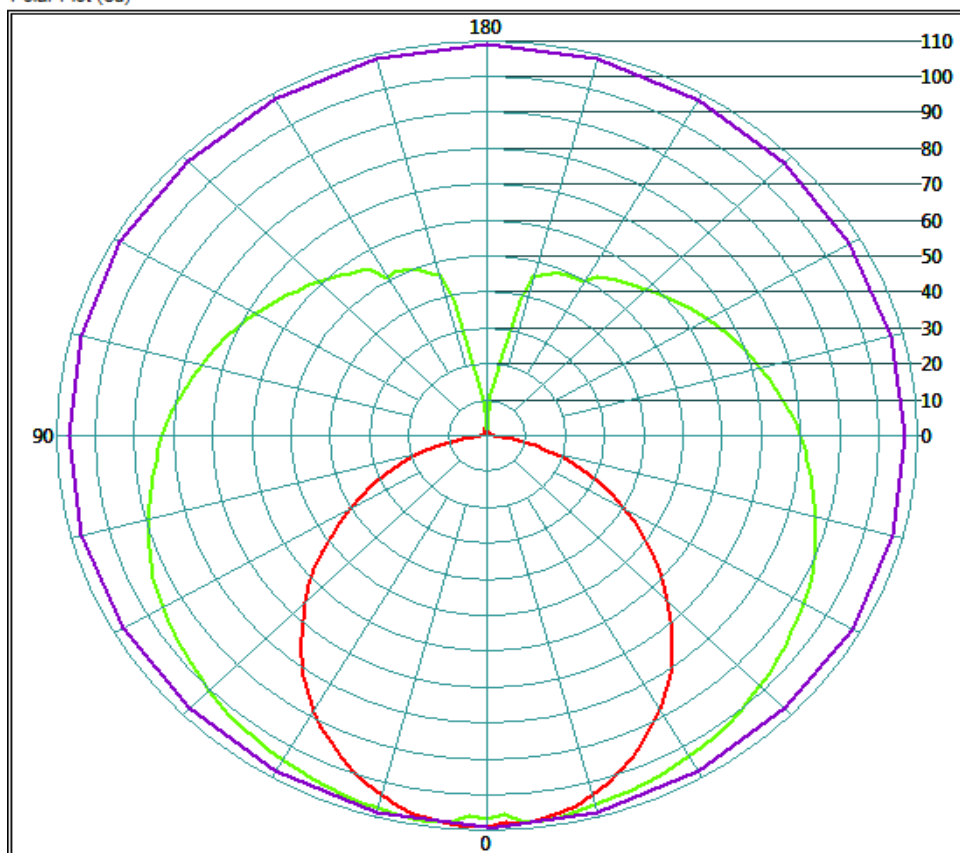

Appendices & non-accredited results

On-axis Spectral Measurement

The following data was determined from an on-axis spectral measurement using a SP1000 spectrometer at a distance of mm, for which these measurements and outputs are not accredited.


Results may differ if compared to spatially averaged colourimetric result (e.g. measured in an integrating sphere).

LM79 requires spatially averaged colourimetric results (i.e. from a sphere, or from a full goni colourimetric scan).

The colourimetric results in this report do not follow those requirements.

BS (EN) 13032 and CIE S025 do not state this requirement.

Spectral Irradiance versus Wavelength

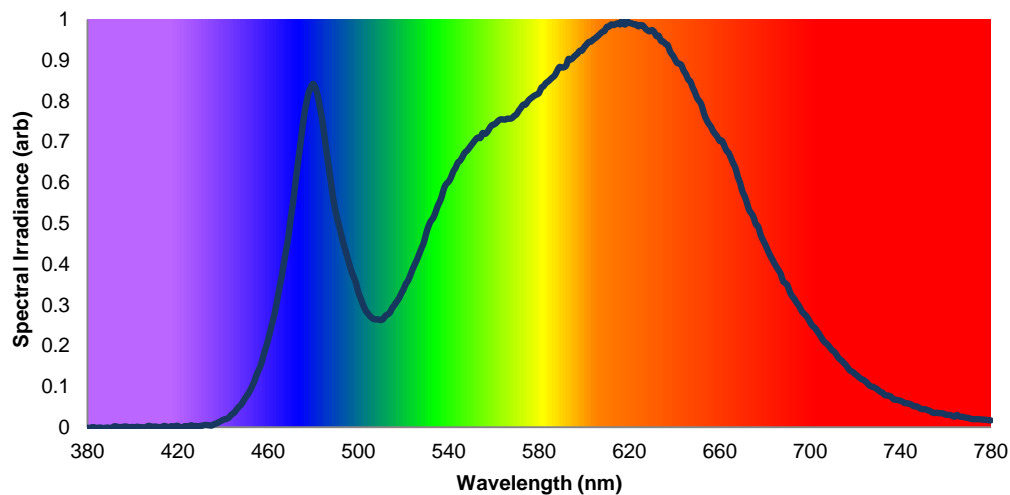


Colour Rendering Index Detail			
R1	76	R8	59
R2	85	R9	-11
R3	94	R10	66
R4	79	R11	77
R5	76	R12	58
R6	80	R13	78
R7	86	R14	97

Colorimetric Details	
CCT	4018K
CRI (Ra)	79

Chromaticity Coordinates		
CIE 1931	x	0.3844
	y	0.3944
CIE 1960	u	0.2208
	v	0.3398
CIE 1976	u'	0.2208
	v'	0.5097
Duv		0.0061


CIE 1931 Colour Chart

• 0.384, 0.394

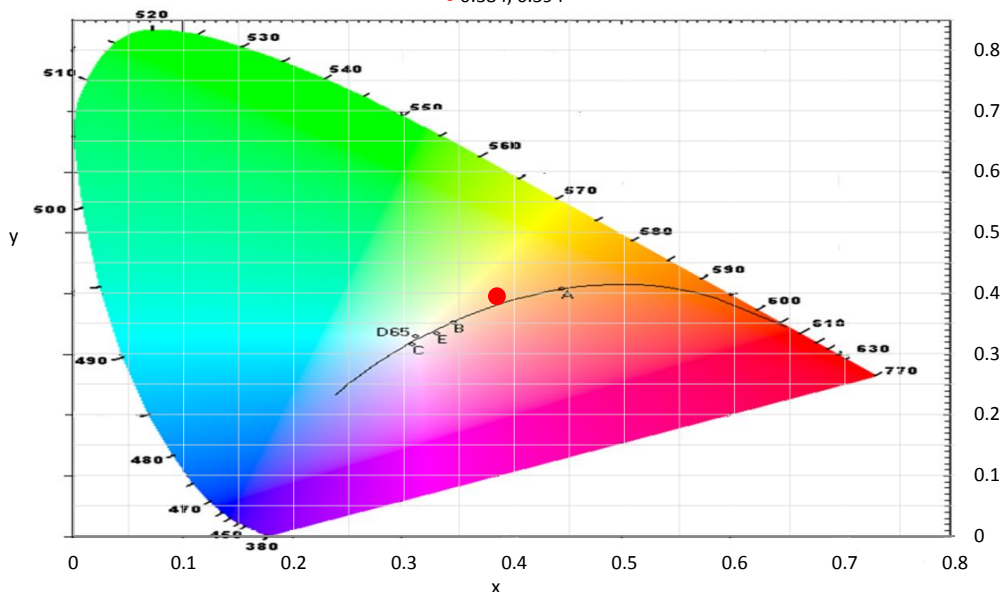

CIE 1931 x, y Chromaticity Diagram - Nominal CCT Quadrangles

• 0.384, 0.394

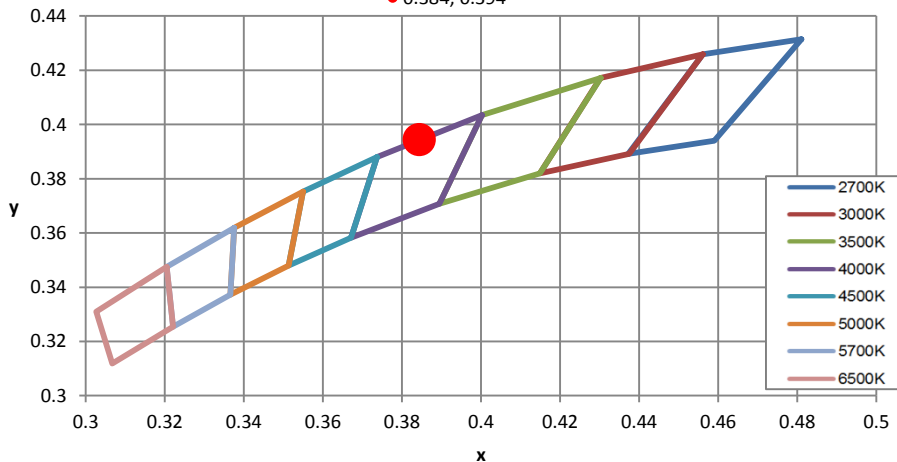

Spectral Power Distribution

λ (nm)	Arb units	λ (nm)	Arb units	λ (nm)	Arb units	λ (nm)	Arb units
380	-7.54E-04	430	3.64E-03	480	8.42E-01	530	4.75E-01
381	-1.97E-03	431	4.20E-03	481	8.33E-01	531	4.93E-01
382	1.79E-04	432	5.94E-03	482	8.12E-01	532	5.05E-01
383	1.54E-04	433	5.48E-03	483	7.84E-01	533	5.13E-01
384	-1.22E-03	434	4.95E-03	484	7.53E-01	534	5.25E-01
385	-6.94E-04	435	4.32E-03	485	7.12E-01	535	5.41E-01
386	-6.50E-04	436	7.55E-03	486	6.71E-01	536	5.53E-01
387	-2.06E-03	437	9.41E-03	487	6.33E-01	537	5.68E-01
388	-1.17E-03	438	1.23E-02	488	5.94E-01	538	5.88E-01
389	-4.77E-04	439	1.51E-02	489	5.55E-01	539	5.97E-01
390	-1.68E-03	440	1.82E-02	490	5.27E-01	540	6.03E-01
391	-2.06E-04	441	2.00E-02	491	5.03E-01	541	6.13E-01
392	2.80E-03	442	2.16E-02	492	4.81E-01	542	6.27E-01
393	1.62E-03	443	2.61E-02	493	4.59E-01	543	6.36E-01
394	7.60E-04	444	3.24E-02	494	4.38E-01	544	6.49E-01
395	5.62E-04	445	3.57E-02	495	4.20E-01	545	6.54E-01
396	1.53E-03	446	4.34E-02	496	4.00E-01	546	6.62E-01
397	2.14E-03	447	4.99E-02	497	3.82E-01	547	6.73E-01
398	8.91E-04	448	5.53E-02	498	3.68E-01	548	6.78E-01
399	1.49E-04	449	6.39E-02	499	3.52E-01	549	6.85E-01
400	9.73E-04	450	7.28E-02	500	3.30E-01	550	6.92E-01
401	7.30E-05	451	8.07E-02	501	3.16E-01	551	6.99E-01
402	1.66E-03	452	9.00E-02	502	3.01E-01	552	7.06E-01
403	3.50E-04	453	1.01E-01	503	2.89E-01	553	7.11E-01
404	6.57E-04	454	1.14E-01	504	2.81E-01	554	7.10E-01
405	-4.46E-04	455	1.30E-01	505	2.74E-01	555	7.22E-01
406	1.02E-03	456	1.42E-01	506	2.68E-01	556	7.19E-01
407	3.55E-03	457	1.57E-01	507	2.65E-01	557	7.24E-01
408	2.68E-03	458	1.77E-01	508	2.65E-01	558	7.33E-01
409	1.47E-03	459	1.95E-01	509	2.65E-01	559	7.41E-01
410	2.09E-03	460	2.14E-01	510	2.63E-01	560	7.43E-01
411	1.02E-03	461	2.37E-01	511	2.66E-01	561	7.46E-01
412	4.81E-04	462	2.59E-01	512	2.74E-01	562	7.52E-01
413	1.22E-03	463	2.82E-01	513	2.77E-01	563	7.55E-01
414	3.47E-03	464	3.11E-01	514	2.82E-01	564	7.55E-01
415	2.02E-03	465	3.42E-01	515	2.93E-01	565	7.55E-01
416	2.10E-04	466	3.69E-01	516	3.00E-01	566	7.57E-01
417	2.78E-03	467	4.03E-01	517	3.09E-01	567	7.57E-01
418	2.39E-03	468	4.35E-01	518	3.17E-01	568	7.58E-01
419	2.97E-03	469	4.68E-01	519	3.29E-01	569	7.64E-01
420	3.87E-03	470	5.12E-01	520	3.39E-01	570	7.67E-01
421	4.46E-05	471	5.49E-01	521	3.52E-01	571	7.76E-01
422	3.40E-07	472	5.95E-01	522	3.60E-01	572	7.84E-01
423	2.70E-03	473	6.40E-01	523	3.73E-01	573	7.91E-01
424	2.91E-03	474	6.81E-01	524	3.88E-01	574	7.91E-01
425	2.70E-03	475	7.25E-01	525	4.00E-01	575	7.99E-01
426	5.21E-03	476	7.66E-01	526	4.12E-01	576	8.05E-01
427	2.77E-03	477	7.97E-01	527	4.26E-01	577	8.09E-01
428	3.43E-03	478	8.21E-01	528	4.40E-01	578	8.14E-01
429	2.19E-03	479	8.34E-01	529	4.54E-01	579	8.16E-01
						580	8.20E-01

Spectral Power Distribution

λ (nm)	Arb units	λ (nm)	Arb units	λ (nm)	Arb units	λ (nm)	Arb units
581	8.33E-01	631	9.69E-01	681	4.38E-01	731	8.76E-02
582	8.37E-01	632	9.59E-01	682	4.25E-01	732	8.55E-02
583	8.44E-01	633	9.60E-01	683	4.15E-01	733	7.94E-02
584	8.48E-01	634	9.48E-01	684	4.04E-01	734	7.79E-02
585	8.53E-01	635	9.46E-01	685	3.95E-01	735	7.75E-02
586	8.58E-01	636	9.40E-01	686	3.86E-01	736	7.43E-02
587	8.63E-01	637	9.37E-01	687	3.76E-01	737	6.85E-02
588	8.74E-01	638	9.22E-01	688	3.59E-01	738	6.77E-02
589	8.83E-01	639	9.14E-01	689	3.54E-01	739	6.66E-02
590	8.83E-01	640	9.05E-01	690	3.48E-01	740	6.52E-02
591	8.83E-01	641	8.94E-01	691	3.33E-01	741	6.27E-02
592	8.87E-01	642	8.92E-01	692	3.22E-01	742	5.92E-02
593	9.03E-01	643	8.88E-01	693	3.15E-01	743	5.91E-02
594	9.02E-01	644	8.75E-01	694	3.06E-01	744	5.75E-02
595	9.06E-01	645	8.67E-01	695	2.99E-01	745	5.53E-02
596	9.12E-01	646	8.53E-01	696	2.88E-01	746	5.14E-02
597	9.16E-01	647	8.48E-01	697	2.80E-01	747	5.18E-02
598	9.23E-01	648	8.33E-01	698	2.75E-01	748	4.89E-02
599	9.24E-01	649	8.22E-01	699	2.68E-01	749	4.56E-02
600	9.32E-01	650	8.07E-01	700	2.58E-01	750	4.46E-02
601	9.39E-01	651	8.00E-01	701	2.49E-01	751	4.43E-02
602	9.45E-01	652	7.90E-01	702	2.45E-01	752	4.22E-02
603	9.46E-01	653	7.70E-01	703	2.37E-01	753	4.04E-02
604	9.51E-01	654	7.56E-01	704	2.29E-01	754	3.69E-02
605	9.55E-01	655	7.45E-01	705	2.20E-01	755	3.51E-02
606	9.60E-01	656	7.38E-01	706	2.12E-01	756	3.58E-02
607	9.65E-01	657	7.27E-01	707	2.07E-01	757	3.49E-02
608	9.70E-01	658	7.19E-01	708	2.01E-01	758	3.47E-02
609	9.72E-01	659	7.12E-01	709	1.94E-01	759	3.40E-02
610	9.82E-01	660	7.02E-01	710	1.88E-01	760	3.13E-02
611	9.83E-01	661	7.03E-01	711	1.84E-01	761	3.07E-02
612	9.88E-01	662	6.91E-01	712	1.75E-01	762	3.02E-02
613	9.86E-01	663	6.79E-01	713	1.68E-01	763	2.81E-02
614	9.89E-01	664	6.72E-01	714	1.63E-01	764	2.60E-02
615	9.91E-01	665	6.60E-01	715	1.58E-01	765	3.06E-02
616	9.88E-01	666	6.47E-01	716	1.52E-01	766	2.70E-02
617	1.00E+00	667	6.35E-01	717	1.44E-01	767	2.60E-02
618	9.88E-01	668	6.14E-01	718	1.38E-01	768	2.54E-02
619	9.96E-01	669	6.00E-01	719	1.35E-01	769	2.38E-02
620	9.91E-01	670	5.79E-01	720	1.30E-01	770	2.32E-02
621	9.91E-01	671	5.67E-01	721	1.26E-01	771	2.12E-02
622	9.88E-01	672	5.51E-01	722	1.21E-01	772	2.02E-02
623	9.88E-01	673	5.33E-01	723	1.18E-01	773	1.99E-02
624	9.83E-01	674	5.25E-01	724	1.15E-01	774	2.02E-02
625	9.86E-01	675	5.15E-01	725	1.10E-01	775	1.99E-02
626	9.85E-01	676	4.98E-01	726	1.04E-01	776	1.92E-02
627	9.78E-01	677	4.93E-01	727	1.01E-01	777	1.90E-02
628	9.73E-01	678	4.74E-01	728	9.88E-02	778	1.83E-02
629	9.71E-01	679	4.61E-01	729	9.61E-02	779	1.77E-02
630	9.74E-01	680	4.50E-01	730	9.24E-02	780	1.70E-02

Measurement Uncertainty

The following is the reported expanded uncertainty of the UL 6440T Type C Mirror Goniophotometer.

Parameter	Uncertainty
Total Luminous Flux (%)	± 4.9
Luminous Intensity (%)	± 4.9
Temperature ($^{\circ}\text{C}$)	± 0.13
Voltage DC TY720 (%)	± 0.017
Current DC TY720 (%)	± 0.10
Voltage AC WT210 (%)	± 0.059
Current AC WT210 (%)	± 0.025
Power AC WT210 (%)	± 0.23
Frequency (50/60 Hz) WT210 (%)	± 0.004
Power Factor WT210 (%)	± 0.06

The reported expanded uncertainty is based on the combined standard uncertainty multiplied by a coverage factor of $k = 2$. This value of k gives a coverage probability of approximately 95%, assuming a normal distribution. This determination of the measurement uncertainty has been done in accordance with international requirements including UKAS, BIPM Guide to the Expression of Uncertainty in Measurement and CIE 198:2011 and CIE S 025/E:2015.

Electrical measurement equipment used for the determination of results for this report, are compliant and meet the performance requirements of the measurement standards used.

----- END OF REPORT -----