

Report Number	GNC-36018
Customer	Encapsulite International Ltd
Contact	Jordan Waumsley
Product Type	LED Tube
Test Purpose	Goniometric (Type C) Intensity Scan - IES/LDT Files & Report - Scan Increments 15 degrees Azimuth by 2.5 degrees inclination
Quote / PO Reference	Q-LUX-302609 / PO (17038)
Works Order Number	WO-36018
Test Standards	LM-79-19; (BS) EN 13032-4:2015 + A1 2019; CIE S025:2015
Testing Conducted at	LUX-TSI Limited Unit 1B Pencoe Technology Park, Pencoe, Bridgend, CF35 5AQ
Tested by	Charles Read
Date of Receipt of Test Item	11/11/2025
Date(s) of Test	13/11/2025
Analysed by	Gareth Jones
Number of products tested	1

Address: LUX-TSI Ltd.,
Pencoe Technology Park,
Pencoe, Bridgend,
CF35 5AQ, UK
Telephone: +44 (0) 1656 864618
Authorised by: G. Jones
Email: CustomerService@lux-tsi.com
Signed:



Date: 14/11/2025

MT50 & MT70 LED Range

Disclaimers

This report is for the exclusive use of LUX-TSI's Customer and is provided pursuant to the agreement between LUX-TSI and its Customer. LUX-TSI's responsibility and reliability are limited to the Terms and Conditions of the agreement. LUX-TSI assumes no liability to any other party, other than the Customer in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Customer is authorised to permit copying or distribution of this report and then only in its entirety. Any use of the LUX-TSI name or one of its marks for the sale or advertisement of the tested material, product or service must be approved in writing by LUX-TSI.

The observations and test results in this report are relevant only to the sample tested. The sample was supplied by the client and not selected by LUX-TSI. Opinions and interpretations are outside the scope of this report. Data supplied in this report, is given in good faith, and based on the information provided by the Customer. This report does not remove the requirement for the Customer to obtain further independent advice and in particular to instruct a notified or competent body or person to carry out further evaluation work and/or testing. Accordingly, no warranty is given, nor is any term or condition to be implied, that the product, which is the subject of this report, complies with the requirements of any EU directives or UK statutory instruments.

TRCL_GC_R19_4

Nomenclature

Lamp Orientation described below relates to the position in which a lamp is designed to operate for maximum performance and safety, these include:

BD - Base Down (bulb is vertically positioned with the metal base at the bottom, glass up)

BU - Base Up (bulb is vertically positioned with the metal base at the top, glass hanging down)

Test Conditions

Measurements were made with an ambient temperature of 25°C +/- 1°C. Measurements were taken only after sufficient time for thermal stabilisation has been allowed. Thermal stabilisation according to LM-79-19 was achieved before measurements are measured and reported.

Calibrations

The far field Type C Goniophotometer is calibrated using an intensity lamp calibrated by a NVLAP accredited calibration laboratory.

Test Equipment

UL LSI Custom Far-Field Type C Moving Mirror Goniophotometer measures intensity as a function of angle. On-axis spectral measurements taken using Gooch and Housego OL770 spectrometer.

Data Formats

IES (15 deg azimuth and 2.5 deg inclination) and LDT (15 deg C planes and 2.5 deg gamma angles)

Spectral Data file from which the calculation of chromaticity and CRI etc. have been performed and the derived results from the LightMtrX software are provided as a text file format.

All photometric data for LED products will be provided in ABSOLUTE photometric format and all non-LED data will be in relative photometric format with lamp lumens measured separately, where possible, for LOR estimation.

Product Name	MT50 & MT70 LED Range
Part/Serial Number	MT50 LED 6 HO
Type of Product	LED Tube
Lamp Base Type	Luminaire

Enter Driver Here

Test Time	11 mins
Operating Orientation	Horizontal
Test Orientation	Horizontal
Ambient Temperature	25.0°C
Manufacturer	Encapsulite International Ltd
Date of Manufacture	N/A
Thermal Management	Passive
Dimmable	No
Pre-Burning Time	0 hours
Stabilisation Time	20 minutes
Humidity	44.9% RH
Averaging Applied	NONE

Driver Details		
Manufacturer	Tridonic	
Model	28005034	
Part/Serial #	N/A	
Driver Type	Internal Driver	
Output	Voltage	N/A
	Current	325mA A
	Power	N/A

Photometric Measurements	
Luminous Flux (lm)	7574 lm
Luminous Efficacy (lm/W)	163 lm/W

Dimension	Sample	Luminous Opening
Diameter/Width	50 mm	50 mm
Length	1770 mm	1680 mm
Height/Depth	50 mm	50 mm


NOTE - these dimensions may not be the same as IES/LDT file due to product geometry for best use in lighting design software

Electrical Measurements	
Frequency	50 Hz
Voltage	230 V
Current	0.207 A
Power	46.5 W
Power Factor	0.977
Apparent Power	47.6 VA

Goniophotometric Measurements

Beam Angle	Horizontal	131°
	Vertical	113°
On-axis Intensity		2116 cd
Peak Intensity		2120 cd
Peak Direction	Horizontal	180°
	Vertical	0°

Polar Plot (cd)

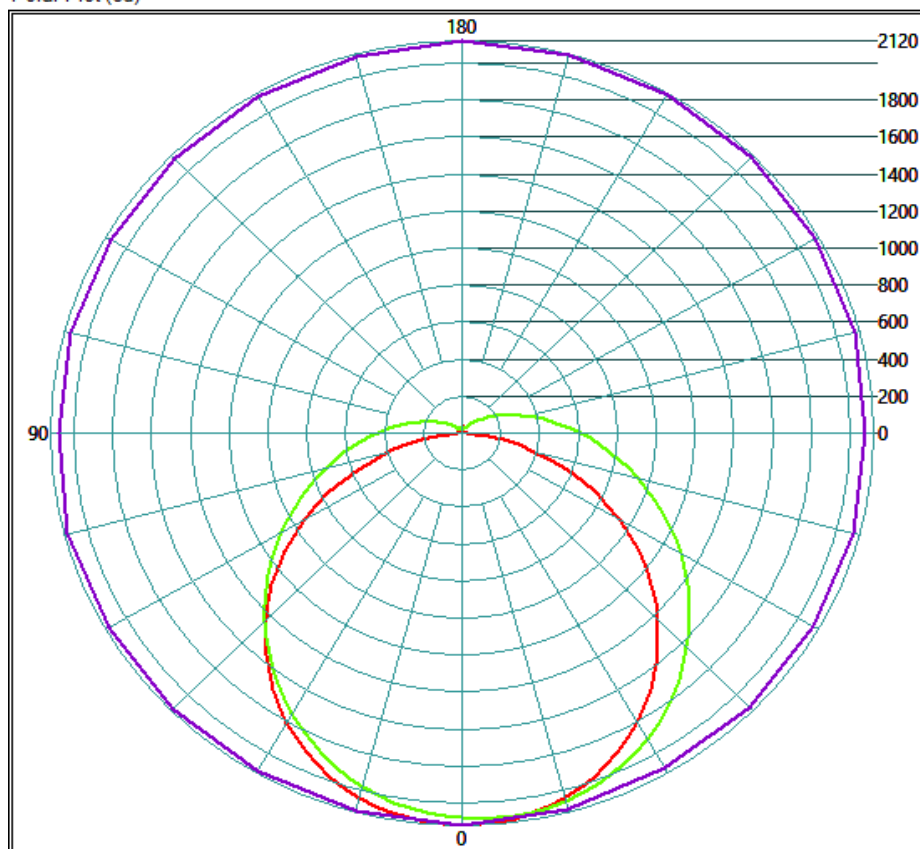

Mounting Height (m)	Beam Width (m)		Projected Illuminance (lux)
	C0-C180 plane	C90-270 plane	
0.5	2.2	1.5	8464
1	4.4	3.0	2116
2	8.7	6.0	529
3	13.1	9.1	235
4	17.4	12.1	132
5	21.8	15.1	85
7.5	32.6	22.6	38
10	43.5	30.2	21
20	87.1	60.4	5

Appendices & non-accredited results

Colorimetric Measurement Results


Obtained via On-axis Spectral Measurement

The following data was determined from an on-axis spectral measurement using a Gooch & Housego OLI770 spectrometer at a distance of 15.4m. Angle of mirror where spectrum is measured is 0 degrees. Results may differ if compared to spatially averaged colourimetric result (e.g. measured in an integrating sphere).

LM79 requires spatially averaged colourimetric results (i.e. from a sphere, or from a full gonio colourimetric scan). The colourimetric results in this report do not follow those requirements.

BS (EN) 13032 and CIE S025 do not state this requirement. Compliance with these standards is observed.



Spectral Irradiance versus Wavelength

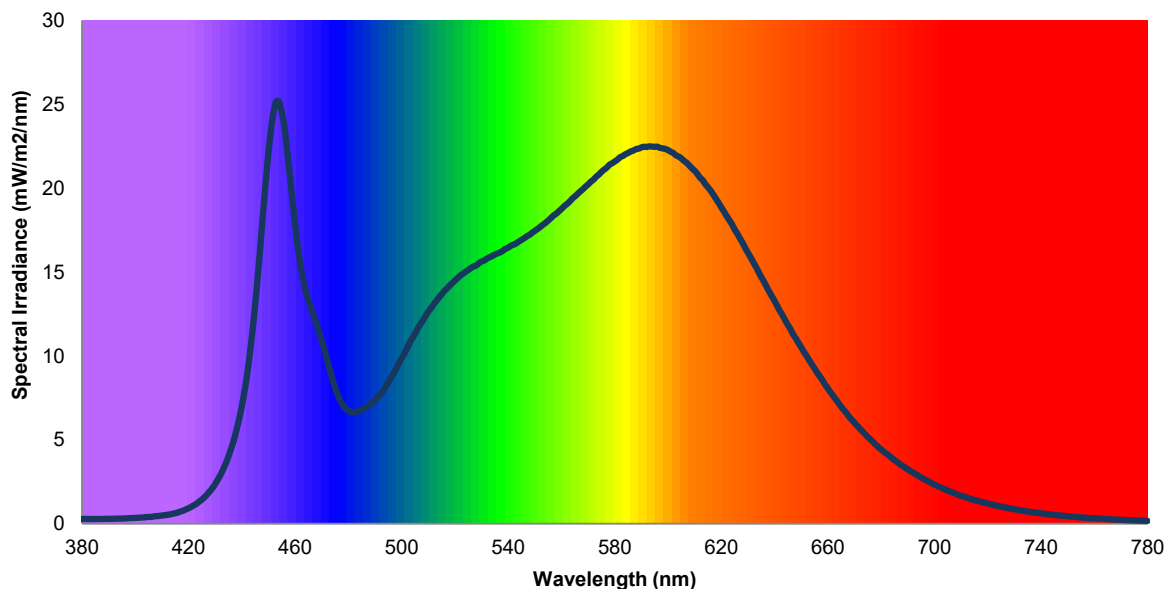

Colour Rendering Index Detail			
R1	80	R8	61
R2	90	R9	0
R3	96	R10	75
R4	79	R11	78
R5	80	R12	59
R6	85	R13	83
R7	84	R14	98

Colorimetric Details	
CCT	3981K
CRI (Ra)	82

Chromaticity Coordinates		
CIE 1931	x	0.3822
	y	0.3807
CIE 1960	u	0.2247
	v	0.3357
CIE 1976	u'	0.2247
	v'	0.5036
Duv		0.0013

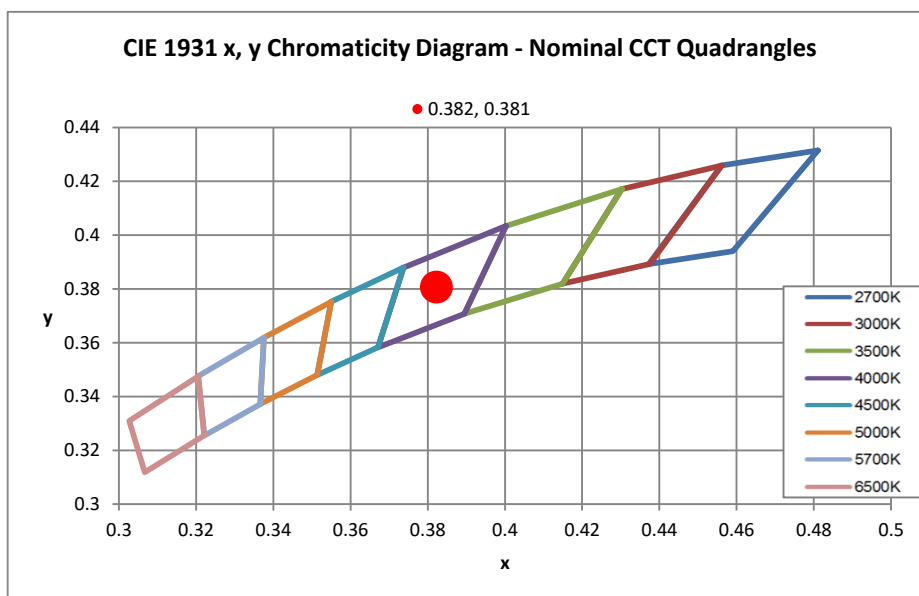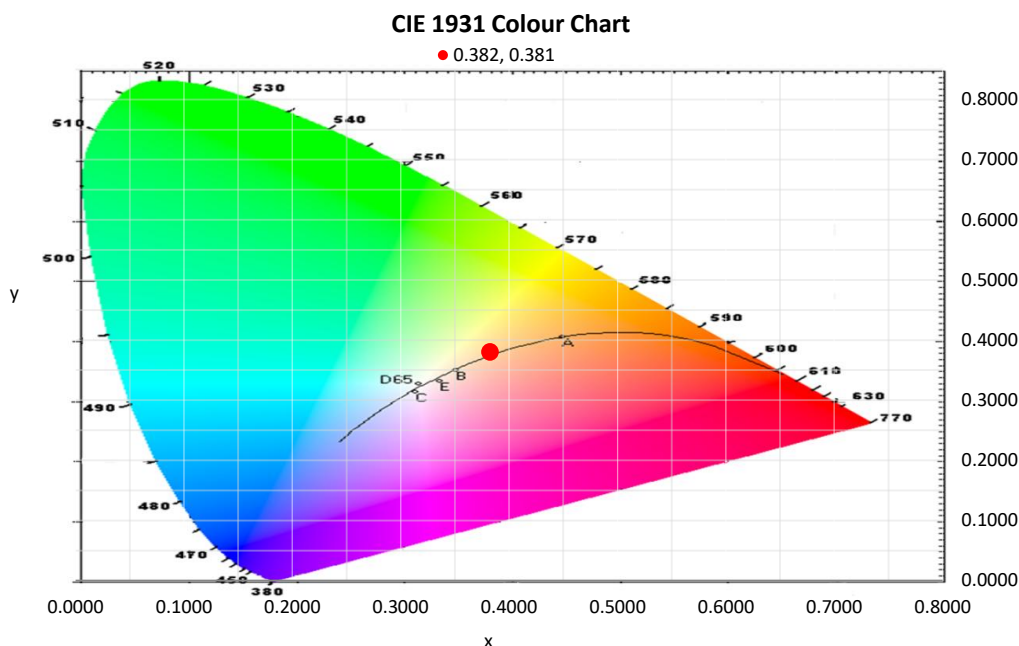

Spectral Power Distribution

λ (nm)	mW/m ² /nm
380	2.74E-01
381	2.88E-01
382	2.77E-01
383	2.84E-01
384	2.75E-01
385	2.78E-01
386	2.86E-01
387	2.84E-01
388	2.81E-01
389	2.91E-01
390	2.92E-01
391	2.94E-01
392	2.94E-01
393	3.05E-01
394	3.03E-01
395	3.09E-01
396	3.12E-01
397	3.26E-01
398	3.33E-01
399	3.43E-01
400	3.44E-01
401	3.57E-01
402	3.67E-01
403	3.73E-01
404	3.91E-01
405	4.05E-01
406	4.06E-01
407	4.37E-01
408	4.55E-01
409	4.65E-01
410	4.91E-01
411	5.06E-01
412	5.34E-01
413	5.54E-01
414	5.93E-01
415	6.23E-01
416	6.73E-01
417	7.31E-01
418	7.79E-01
419	8.54E-01
420	9.25E-01
421	1.01E+00
422	1.10E+00
423	1.19E+00
424	1.32E+00
425	1.44E+00
426	1.58E+00
427	1.76E+00
428	1.94E+00
429	2.14E+00

λ (nm)	mW/m ² /nm
430	2.37E+00
431	2.64E+00
432	2.92E+00
433	3.25E+00
434	3.61E+00
435	4.03E+00
436	4.50E+00
437	5.00E+00
438	5.61E+00
439	6.26E+00
440	7.02E+00
441	7.91E+00
442	8.92E+00
443	1.01E+01
444	1.15E+01
445	1.31E+01
446	1.48E+01
447	1.67E+01
448	1.86E+01
449	2.04E+01
450	2.22E+01
451	2.36E+01
452	2.47E+01
453	2.52E+01
454	2.51E+01
455	2.45E+01
456	2.36E+01
457	2.22E+01
458	2.08E+01
459	1.93E+01
460	1.78E+01
461	1.65E+01
462	1.54E+01
463	1.46E+01
464	1.39E+01
465	1.33E+01
466	1.28E+01
467	1.24E+01
468	1.19E+01
469	1.14E+01
470	1.09E+01
471	1.04E+01
472	9.74E+00
473	9.19E+00
474	8.63E+00
475	8.10E+00
476	7.68E+00
477	7.30E+00
478	7.05E+00
479	6.85E+00

λ (nm)	mW/m ² /nm
480	6.73E+00
481	6.66E+00
482	6.65E+00
483	6.67E+00
484	6.72E+00
485	6.81E+00
486	6.89E+00
487	6.98E+00
488	7.10E+00
489	7.24E+00
490	7.37E+00
491	7.56E+00
492	7.71E+00
493	7.95E+00
494	8.17E+00
495	8.42E+00
496	8.72E+00
497	8.96E+00
498	9.27E+00
499	9.58E+00
500	9.87E+00
501	1.01E+01
502	1.05E+01
503	1.08E+01
504	1.11E+01
505	1.13E+01
506	1.16E+01
507	1.19E+01
508	1.21E+01
509	1.24E+01
510	1.27E+01
511	1.29E+01
512	1.31E+01
513	1.33E+01
514	1.35E+01
515	1.37E+01
516	1.39E+01
517	1.40E+01
518	1.42E+01
519	1.43E+01
520	1.45E+01
521	1.46E+01
522	1.48E+01
523	1.49E+01
524	1.50E+01
525	1.51E+01
526	1.52E+01
527	1.53E+01
528	1.54E+01
529	1.55E+01

λ (nm)	mW/m ² /nm
530	1.56E+01
531	1.57E+01
532	1.58E+01
533	1.59E+01
534	1.60E+01
535	1.60E+01
536	1.61E+01
537	1.62E+01
538	1.63E+01
539	1.64E+01
540	1.65E+01
541	1.66E+01
542	1.66E+01
543	1.67E+01
544	1.68E+01
545	1.69E+01
546	1.70E+01
547	1.71E+01
548	1.72E+01
549	1.73E+01
550	1.75E+01
551	1.76E+01
552	1.77E+01
553	1.78E+01
554	1.79E+01
555	1.81E+01
556	1.82E+01
557	1.84E+01
558	1.85E+01
559	1.86E+01
560	1.88E+01
561	1.89E+01
562	1.91E+01
563	1.92E+01
564	1.94E+01
565	1.95E+01
566	1.97E+01
567	1.98E+01
568	1.99E+01
569	2.01E+01
570	2.02E+01
571	2.04E+01
572	2.05E+01
573	2.07E+01
574	2.08E+01
575	2.10E+01
576	2.11E+01
577	2.12E+01
578	2.14E+01
579	2.15E+01
580	2.16E+01

Spectral Power Distribution

λ (nm)	mW/m ² /nm
581	2.17E+01
582	2.18E+01
583	2.19E+01
584	2.20E+01
585	2.21E+01
586	2.22E+01
587	2.22E+01
588	2.23E+01
589	2.24E+01
590	2.24E+01
591	2.25E+01
592	2.25E+01
593	2.25E+01
594	2.25E+01
595	2.25E+01
596	2.25E+01
597	2.24E+01
598	2.24E+01
599	2.23E+01
600	2.23E+01
601	2.22E+01
602	2.21E+01
603	2.20E+01
604	2.19E+01
605	2.18E+01
606	2.16E+01
607	2.15E+01
608	2.13E+01
609	2.12E+01
610	2.10E+01
611	2.09E+01
612	2.06E+01
613	2.05E+01
614	2.02E+01
615	2.01E+01
616	1.99E+01
617	1.96E+01
618	1.94E+01
619	1.91E+01
620	1.89E+01
621	1.86E+01
622	1.83E+01
623	1.81E+01
624	1.79E+01
625	1.75E+01
626	1.73E+01
627	1.70E+01
628	1.67E+01
629	1.64E+01
630	1.61E+01

λ (nm)	mW/m ² /nm
631	1.59E+01
632	1.56E+01
633	1.53E+01
634	1.50E+01
635	1.47E+01
636	1.44E+01
637	1.41E+01
638	1.38E+01
639	1.35E+01
640	1.33E+01
641	1.30E+01
642	1.27E+01
643	1.24E+01
644	1.21E+01
645	1.18E+01
646	1.16E+01
647	1.13E+01
648	1.10E+01
649	1.08E+01
650	1.05E+01
651	1.02E+01
652	1.00E+01
653	9.75E+00
654	9.50E+00
655	9.26E+00
656	9.00E+00
657	8.78E+00
658	8.55E+00
659	8.28E+00
660	8.07E+00
661	7.83E+00
662	7.62E+00
663	7.41E+00
664	7.19E+00
665	6.97E+00
666	6.78E+00
667	6.59E+00
668	6.38E+00
669	6.20E+00
670	6.01E+00
671	5.84E+00
672	5.67E+00
673	5.51E+00
674	5.34E+00
675	5.17E+00
676	5.02E+00
677	4.87E+00
678	4.70E+00
679	4.57E+00
680	4.43E+00

λ (nm)	mW/m ² /nm
681	4.30E+00
682	4.17E+00
683	4.05E+00
684	3.92E+00
685	3.79E+00
686	3.68E+00
687	3.56E+00
688	3.45E+00
689	3.35E+00
690	3.24E+00
691	3.15E+00
692	3.04E+00
693	2.95E+00
694	2.85E+00
695	2.76E+00
696	2.67E+00
697	2.59E+00
698	2.50E+00
699	2.42E+00
700	2.33E+00
701	2.26E+00
702	2.18E+00
703	2.12E+00
704	2.05E+00
705	1.97E+00
706	1.92E+00
707	1.85E+00
708	1.79E+00
709	1.72E+00
710	1.67E+00
711	1.62E+00
712	1.56E+00
713	1.51E+00
714	1.46E+00
715	1.41E+00
716	1.38E+00
717	1.33E+00
718	1.28E+00
719	1.24E+00
720	1.21E+00
721	1.16E+00
722	1.12E+00
723	1.09E+00
724	1.05E+00
725	1.02E+00
726	9.83E-01
727	9.54E-01
728	9.23E-01
729	8.90E-01
730	8.64E-01

λ (nm)	mW/m ² /nm
731	8.35E-01
732	8.01E-01
733	7.80E-01
734	7.52E-01
735	7.30E-01
736	7.02E-01
737	6.79E-01
738	6.60E-01
739	6.38E-01
740	6.20E-01
741	5.95E-01
742	5.81E-01
743	5.58E-01
744	5.38E-01
745	5.23E-01
746	5.06E-01
747	4.89E-01
748	4.75E-01
749	4.62E-01
750	4.47E-01
751	4.32E-01
752	4.15E-01
753	4.07E-01
754	3.90E-01
755	3.77E-01
756	3.66E-01
757	3.54E-01
758	3.44E-01
759	3.35E-01
760	3.23E-01
761	3.11E-01
762	2.99E-01
763	2.90E-01
764	2.83E-01
765	2.72E-01
766	2.62E-01
767	2.57E-01
768	2.48E-01
769	2.39E-01
770	2.35E-01
771	2.27E-01
772	2.16E-01
773	2.10E-01
774	2.04E-01
775	1.98E-01
776	1.94E-01
777	1.85E-01
778	1.78E-01
779	1.75E-01
780	1.68E-01

Measurement Uncertainty

The following is the reported expanded uncertainty of the UL 6440T Type C Mirror Goniophotometer.

Parameter	Equipment Ref	Uncertainty
Total Luminous Flux (%)	NA	± 6.47
Luminous Intensity (%)	NA	± 6.47
Temperature (°C)	LX1019GC	± 0.13
Voltage DC TY720 (%)	LX1008GC	± 0.017
Current DC TY720 (%)	LX1012SP	± 0.670
Voltage AC WT210 (%)	LX1003GC	± 0.15
Current AC WT210 (%)	LX1003GC	± 0.13
Power AC WT210 (%)	LX1003GC	± 0.27
Frequency (50/60 Hz) WT210 (%)	LX1003GC	± 0.002

The reported expanded uncertainty is based on the combined standard uncertainty multiplied by a coverage factor of $k = 2$. This value of k gives a coverage probability of approximately 95%, assuming a normal distribution. This determination of the measurement uncertainty has been done in accordance with international requirements including UKAS, BIPM Guide to the Expression of Uncertainty in Measurement and CIE 198:2011 and CIE S 025/E:2015.

Electrical measurement equipment used for the determination of results for this report, are compliant and meet the performance requirements of the measurement standards used.

----- END OF REPORT -----