

ECO LED Sticklite

Technical Datasheet

Electrical Information

Nominal Input Range: 220-240v
 Operating Frequency: 50/60 Hz
 Harmonic Distortion: <52%

Mechanical Information

Mounting Type: Surface/Suspended
 Outer Casing Material: Polycarbonate/ABS
 Diameter: 34.5mm

Performance Information

Lumen output from source: See Table
 CRI Rating: 80+
 CCT Available: 3000K/4000K/6500K
 Macadam Step: 5
 Lifetime: Up to 30,000hrs
 Coloured Sleeves: Available



Note to be added - LED module performance evaluated
 Tp of 55°C & Ta of 25°C

Environmental Information

IP Rating: Luminaire - IP20
 Operating Temp: -20°C to +45°C
 Safety Class: II
 Power Cable Supplied: 3m (Longer Available)

Certification

CE
 UKCA

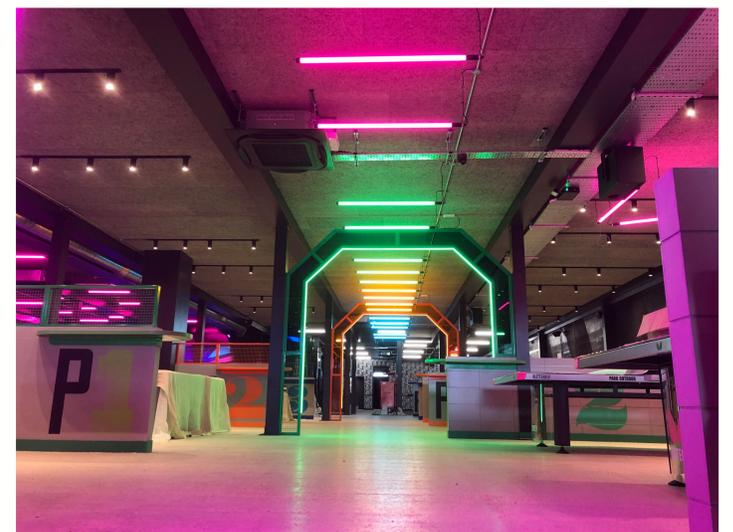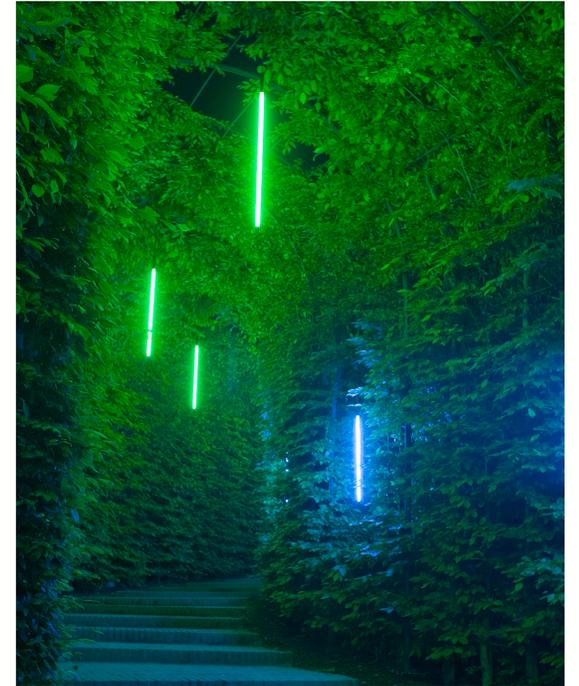

Details	Length	Illuminated Length	Lumens	Wattage
ECO LED 2	650mm	500mm	708	8
ECO LED 3	960mm	810mm	1061	10
ECO LED 4	1260mm	1110mm	1654	15
ECO LED 5	1560mm	1410mm	2033	20