

MT360 LED V3

Technical Datasheet

Electrical Information

Nominal Input: 24v DC

Mechanical Information

Mounting Type: Surface (Standard)
Suspended
Outer Casing: Polycarbonate/ABS
Diameter: 34mm

Performance Information

Lumen output: See Table
CRI Rating: >90
CCT Available: 2700K/3000K/4000K
Macadam Step: 3
Lifetime: Up to 50,000hrs
Coloured Sleeves: Available

Note to be added - LED module performance Evaluated. Tp of 55°C & Ta of 25°C


Environmental Information

IP Rating: Luminaire - IP20
LED Driver: Remote
Operating Temp: -20°C to +45°C
Safety Class: II
Power Cable: 3m (Longer Available)

Certification

CE
UKCA

Cat No.	Length (mm)	Lumens	Wattage	Weight (Kg)
MT360 LED V3 6	415	897	12	0.58
MT360 LED V3 7	478	1040	14	0.62
MT360 LED V3 8	540	1181	15	0.66
MT360 LED V3 9	603	1324	17	0.70
MT360 LED V3 10	665	1465	19	0.74
MT360 LED V3 11	728	1608	21	0.78
MT360 LED V3 12	790	1749	23	0.82
MT360 LED V3 13	853	1892	25	0.86
MT360 LED V3 14	915	2033	27	0.90
MT360 LED V3 15	978	2176	29	0.94
MT360 LED V3 16	1040	2317	30	0.98
MT360 LED V3 17	1103	2460	32	1.02
MT360 LED V3 18	1165	2601	34	1.06
MT360 LED V3 19	1228	2744	36	1.10
MT360 LED V3 20	1290	2885	38	1.14
MT360 LED V3 21	1353	3028	40	1.18
MT360 LED V3 22	1415	3169	42	1.22
MT360 LED V3 23	1478	3312	44	1.26
MT360 LED V3 24	1540	3452	45	1.30
MT360 LED V3 25	1603	3595	47	1.34
MT360 LED V3 26	1665	3735	49	1.38
MT360 LED V3 27	1728	3879	51	1.42
MT360 LED V3 28	1790	4020	53	1.46
MT360 LED V3 29	1853	4163	55	1.50
MT360 LED V3 30	1915	4304	57	1.54
MT360 LED V3 31	1978	4447	59	1.58
MT360 LED V3 32	2040	4588	60	1.62

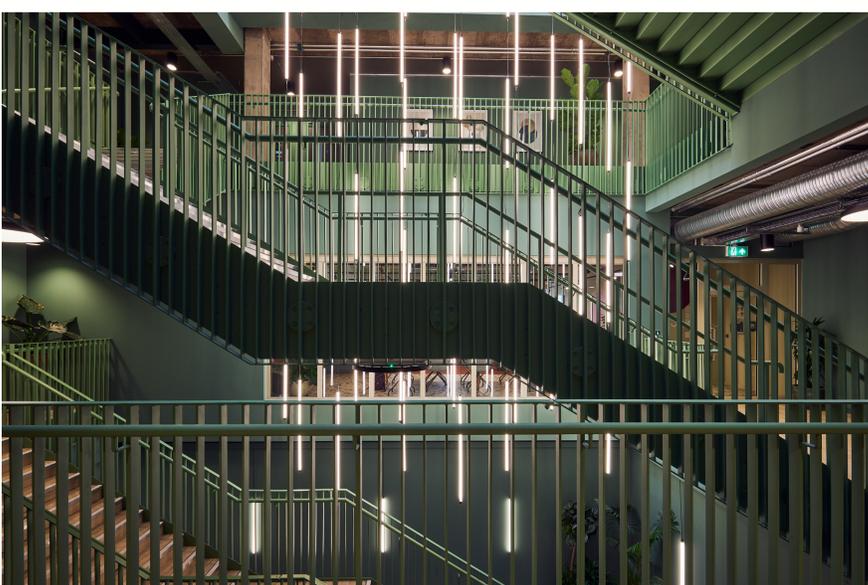

Remote Driver Options

LED Driver	Fixed	DALI	1-10v	Lead/ Trailing Edge	Wireless
35w	●	●			●
60w	●	●		●	●
100w	●	●	●	●	●
150w		●		●	●
200w	●		●		
480w	●	●			