

MT70 LED HE AC

Technical Datasheet



Electrical Information

Nominal Input Voltage: 220-240V AC
Input Frequency Range: 50-60Hz
Surge Protection: 2kV
Output Current: 175mA
Dimming Protocol: Fixed / 1-10v / DALI

Mechanical Information

Mounting Type: Surface (Standard) /Suspended
Outer Casing Material: Polycarbonate
Diameter: 75mm

Performance Information


CRI: >80 (Standard) Or >90
CCT: 3000K / 4000K / 6500K
Macadam Step: 3
Beam Angle: 180°
Diffuser: Opal / Clear
Lifetime: 72,000 Hrs

Environmental Information

IP Rating: IP20
Temperature Range: -20°C To +50°C
Warranty: 3 Years

Certification

CE
UKCA

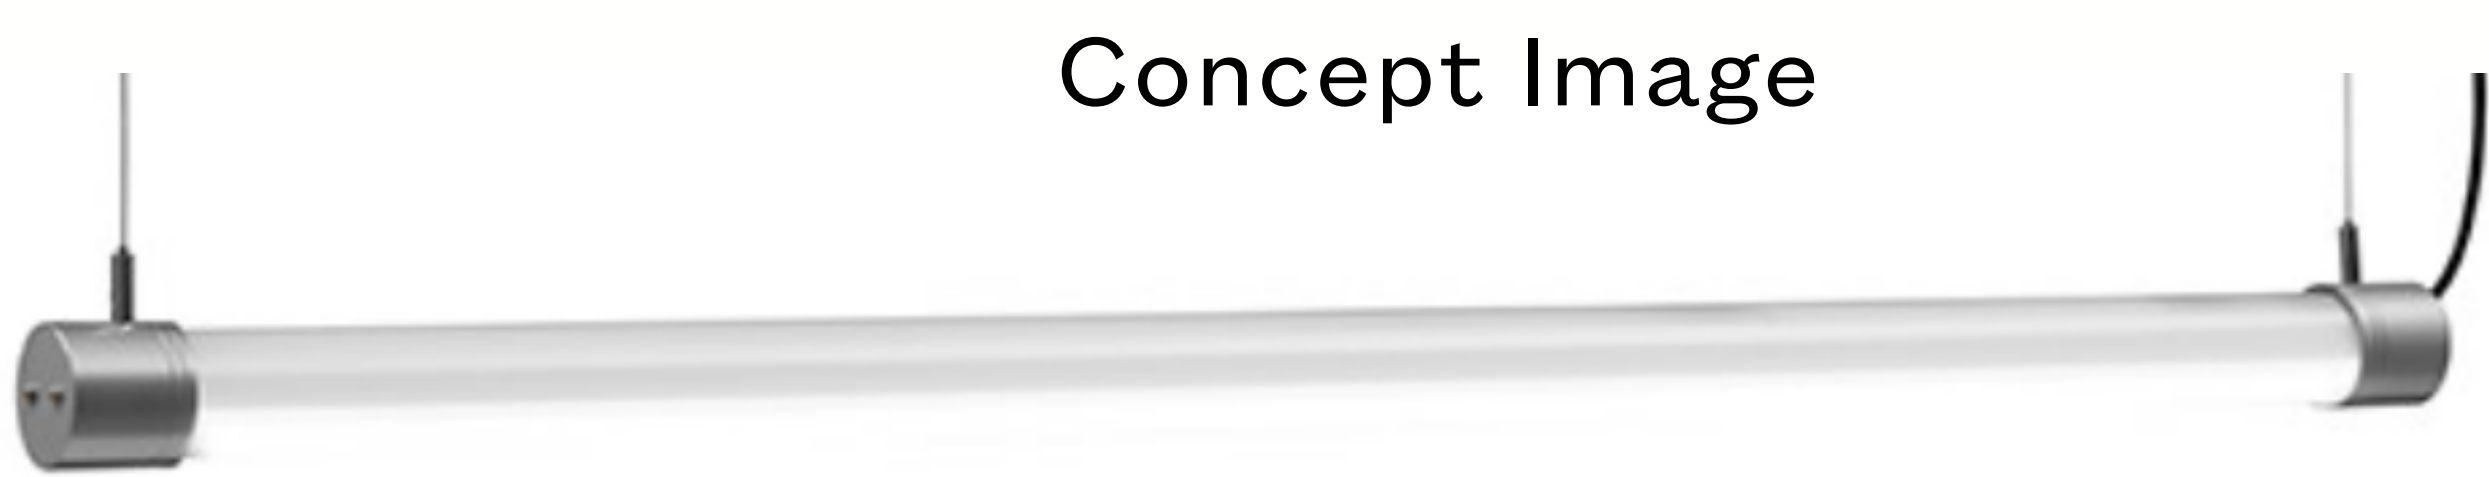

Mounting Brackets
Plastic / Metal



Cat No.	Length (mm)	Lumens (CL) / EC	Lumens (Opal) / EC	Wattage	Weight (kg)
MT70 LED 2 HE AC	582	1552 / 769	1386 / 670	9	0.77
MT70 LED 3 HE AC	862	2328 / 751	2073 / 654	13	0.98
MT70 LED 4 HE AC	1142	3104 / 745	2742 / 649	17	1.18
MT70 LED 5 HE AC	1422	3880 / 749	3480 / 652	21	1.38
MT70 LED 6 HE AC	1702	4656 / 745	4281 / 649	26	1.58
MT70 LED 7 HE AC	1982	5432 / 748	5079 / 651	30	1.79
MT70 LED 8 HE AC	2262	6242 / 749	5802 / 652	34	2.01

All Photometric Data is measured at 4000K
EC - Emergency Conversion
CL - Clear Outer Casing
Opal - Outer Casing