

MT70 LED HE IP67

Technical Datasheet



Electrical Information

Nominal Input Voltage: 220-240V AC
Input Frequency Range: 50-60Hz
Surge Protection: 2kV
Output Current: 175mA
Dimming Protocol: Fixed / 1-10v / DALI

Concept Image



Mechanical Information

Mounting Type: Surface (Standard) /Suspended
Outer Casing Material: Polycarbonate
Diameter: 75mm

Performance Information

CRI: >80 (Standard) Or >90
CCT: 3000K / 4000K / 6500K
Macadam Step: 3
Beam Angle: 180°
Diffuser: Opal / Clear
Lifetime: 72,000 Hrs


Mounting Brackets
Plastic / Metal



Environmental Information

IP Rating: IP67
Temperature Range: -20°C To +50°C
Warranty: 5 Years
IK Rating: IK10

Opal

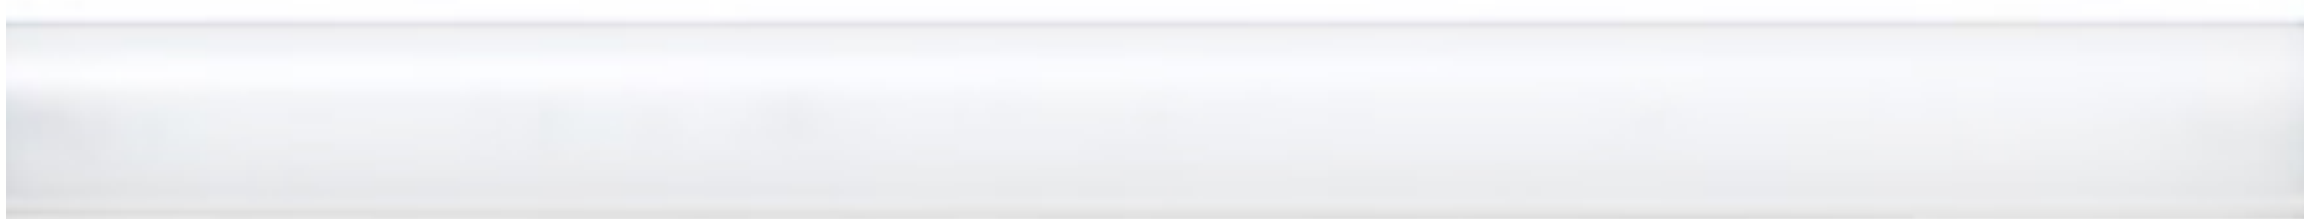

Clear



Certification

CE
UKCA

Cat No.	Length (mm)	Lumens (CL) / EC	Lumens (Opal) / EC	Wattage	Weight (kg)
MT70 LED 2 HE IP67	655	1552 / 769	1386 / 670	9	0.87
MT70 LED 3 HE IP67	935	2328 / 751	2073 / 654	13	1.08
MT70 LED 4 HE IP67	1215	3104 / 745	2742 / 649	17	1.28
MT70 LED 5 HE IP67	1495	3880 / 749	3480 / 652	21	1.48
MT70 LED 6 HE IP67	1775	4656 / 745	4281 / 649	26	1.68
MT70 LED 7 HE IP67	2055	5432 / 748	5079 / 651	30	1.89
MT70 LED 8 HE IP67	2335	6242 / 749	5802 / 652	34	2.11

All Photometric Data is measured at 4000K
EC - Emergency Conversion
CL - Clear Outer Casing
Opal - Outer Casing

Encapsulite International Ltd
Unit 17 chartmoor Road
Chartwell business park
Leighton buzzard, LU7 4WG

For further information or options,
Call: 01525 376974
Email: sales@encapsulite.co.uk
Or visit: www.encapsulite.co.uk