

# Bubble Wafer

## Technical Datasheet



### **Electrical Information**

Nominal Input Range: 220-240V AC  
 Frequency: 50/60 Hz  
 Inrush Current / Duration: 42.7 A / 142  $\mu$ s  
 Max Output Voltage: 350v

### **Mechanical Information**

Mounting Type: Suspended  
 Outer Casing Material: Aluminium/PMMA

### **Performance Information**

CRI Rating: 86  
 CCT Available: 4000K  
 Dimming Range: 1-100%  
 Lifetime: Up to 54,000Hrs  
 UGR: 16/19 Compliant


Note to be added - LED module performance evaluated  
 Tp of 55°C & Ta of 25°C

### **Environmental Information**

IP Rating: IP20  
 Temp Range: -20 to +65°C

### **Certification**

CE  
 UKCA  
 TM65 & TM66 Available

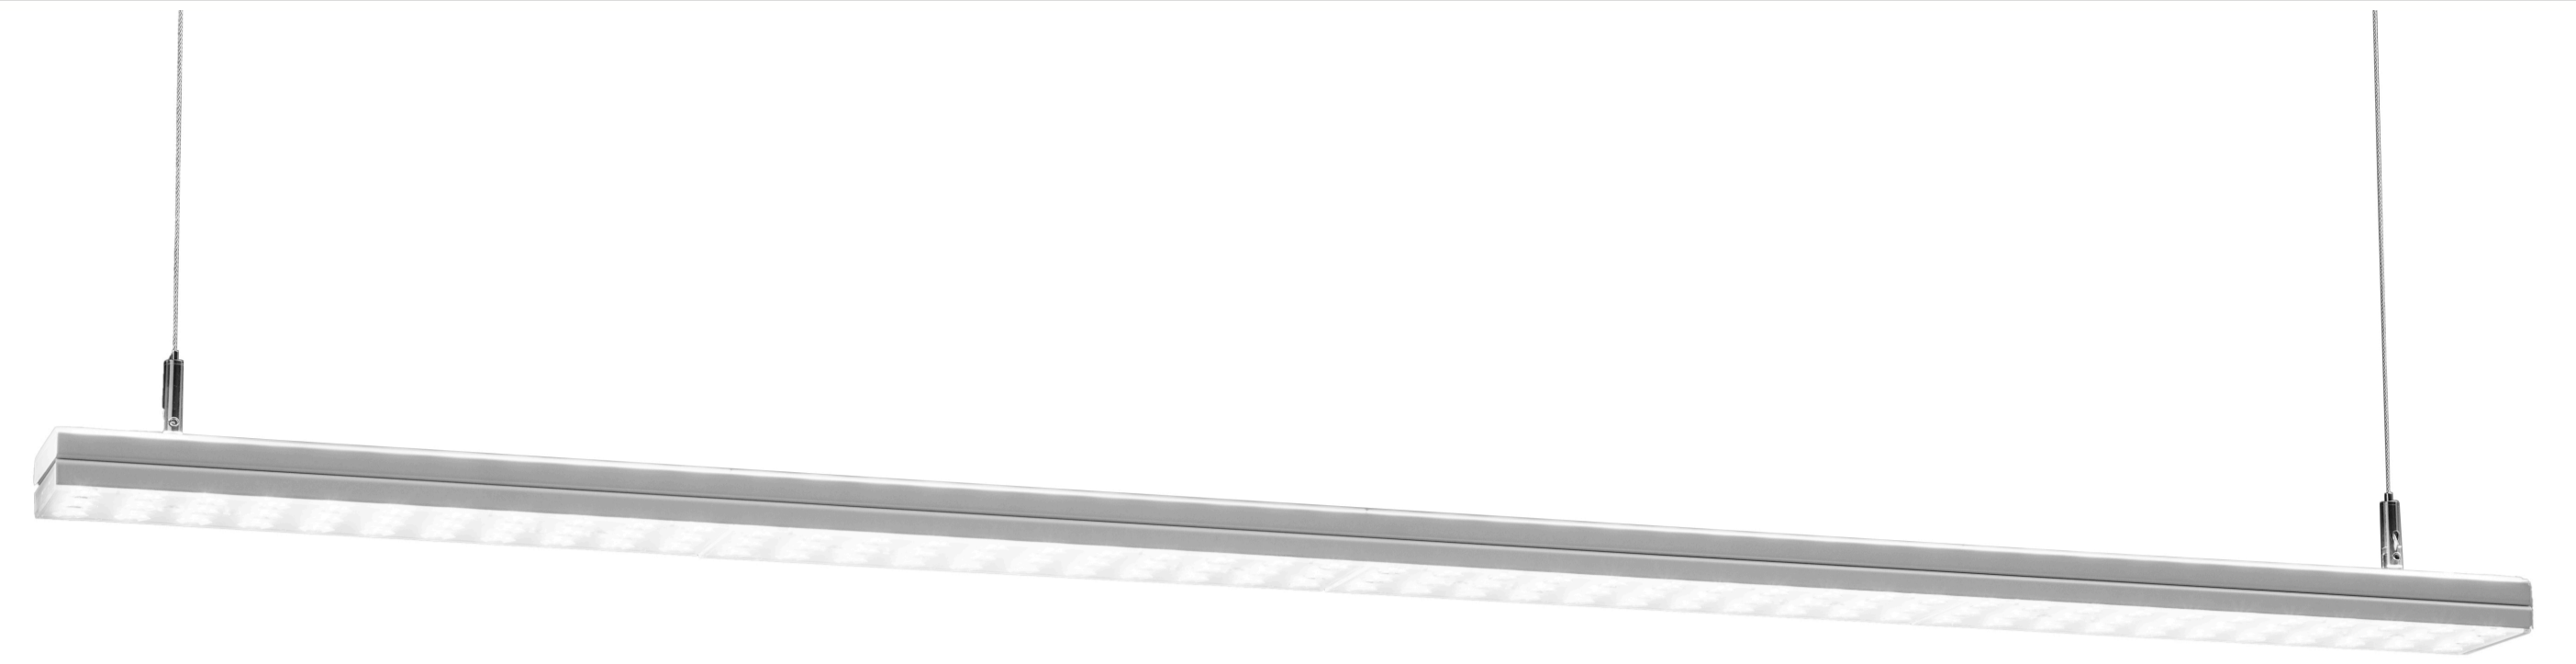

Cat No.	Length (mm)	Lumen Output	Wattage	Weight (Kg)
BW RD1	580	4140 - 8050	24-44	1.35
BW RD2	1160	8280 - 16,100	48-88	1.85
BW ID2 SC	1160	8280 - 16,100	48-88	1.85
BW ID2 UGR 16	1160	8280 - 13,046	48-88	1.85

UGR Unified Glare Rating  
 SC Satin Cover  
 ID Integral Driver  
 RD Remote Driver

**Encapsulite International Ltd**  
 Unit 17 chartmoor Road  
 Chartwell business park  
 Leighton buzzard, LU7 4WG

For further information or options,  
 Call: 01525 376974  
 Email: [sales@encapsulite.co.uk](mailto:sales@encapsulite.co.uk)  
 Or visit: [www.encapsulite.co.uk](http://www.encapsulite.co.uk)