24v RD TS V3
Technical Datasheet

ILLUMINATING BY DESIGN

Electrical Information
Nominal Input Range: 24v DC


Mechanical Information
Mounting Type: Surface/Suspended
Outer Casing: Polycarbonate/ABS
Diameter: 34mm

Performance Information
Lumen output: See Table
CRI Rating: 95
CCT Available: 2700K/3000K/4000K
Macadam Step: 3
Lifetime: Up to 50,000hrs
Coloured Sleeves: Available

Note to be added - LED module performance Evaluated. Tp of 55°C & Ta of 25°C

Environmental Information
IP Rating: Luminaire - IP20
LED Driver: Remote
Operating Temp: -20°C to +45°C
Safety Class: II
Power Cable: 3m (Longer Available)

Certification
CE
UKCA

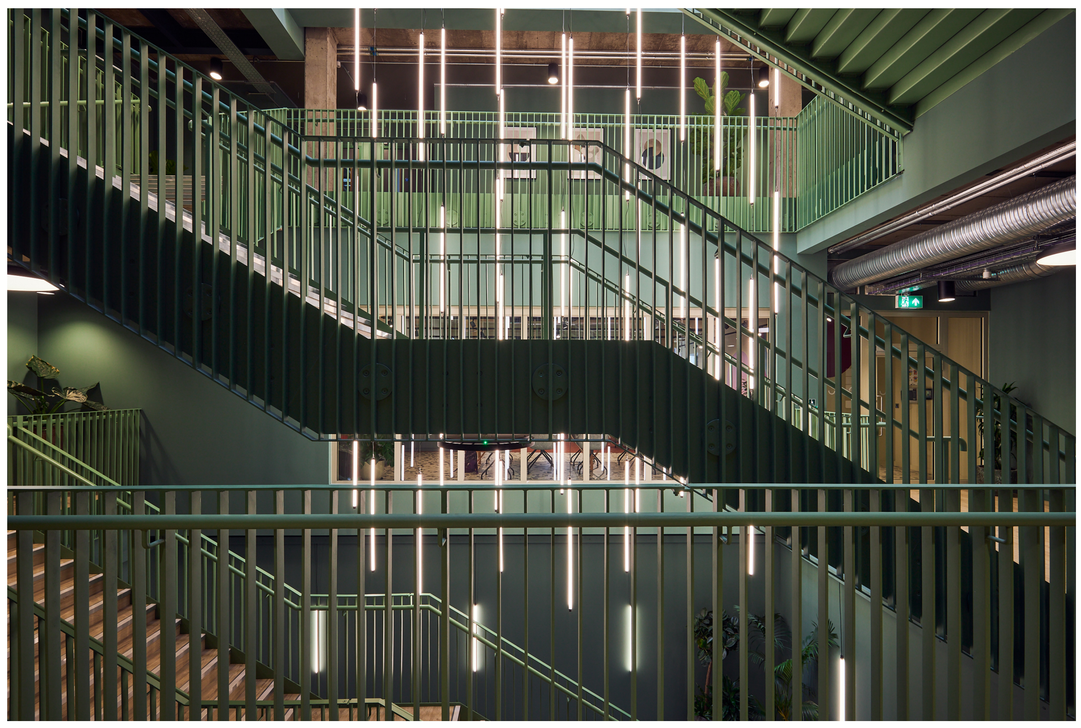

Cat No.	Length (mm)	Illuminated Length (mm)	Lumens	Wattage
24v RD TS V3 6	405	345	469	8
24v RD TS V3 7	468	408	556	9
24v RD TS V3 8	530	470	642	10
24v RD TS V3 9	593	533	728	11
24v RD TS V3 10	655	595	813	13
24v RD TS V3 11	718	658	900	14
24v RD TS V3 12	780	720	986	15
24v RD TS V3 13	843	783	1072	16
24v RD TS V3 14	905	845	1158	18
24v RD TS V3 15	968	908	1245	19
24v RD TS V3 16	1030	970	1330	20
24v RD TS V3 17	1093	1033	1417	22
24v RD TS V3 18	1155	1095	1503	23
24v RD TS V3 19	1218	1158	1589	24
24v RD TS V3 20	1280	1220	1675	25
24v RD TS V3 21	1343	1283	1762	27
24v RD TS V3 22	1405	1345	1847	28
24v RD TS V3 23	1468	1408	1934	29
24v RD TS V3 24	1530	1470	2019	31
24v RD TS V3 25	1593	1533	2106	32
24v RD TS V3 26	1655	1595	2192	33
24v RD TS V3 27	1718	1658	2279	34
24v RD TS V3 28	1780	1720	2364	36
24v RD TS V3 29	1843	1783	2451	37
24v RD TS V3 30	1905	1845	2536	38
24v RD TS V3 31	1968	1908	2623	40
24v RD TS V3 32	2030	1970	2709	41

LED Driver	Fixed	DALI	1-10v	Lead/ Traling	Wireless
35w	●	●			●
60w	●	●		●	●
100w	●	●	●	●	●
150w		●		●	●
200w	●		●		
480w	●	●			

Encapsulite International Ltd
Unit 17 Chartmoor Road
Chartwell Business Park
Leighton Buzzard, LU7 4WG

For further information or options,
Call: 01525 376974
Email: sales@encapsulite.co.uk
Or visit: www.encapsulite.co.uk