
ECO LED IP64





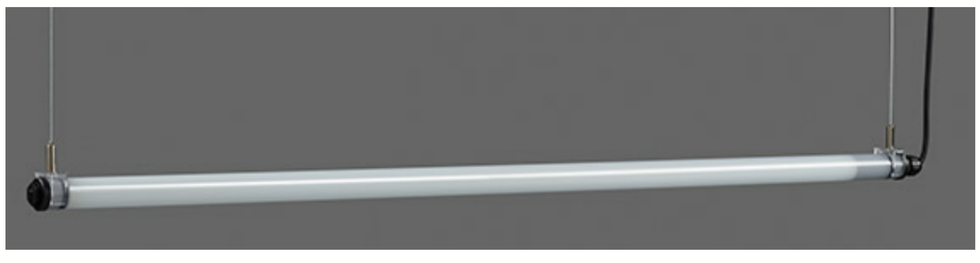

Electrical Information

Nominal Input Range:	220-240v
Operating Frequency:	50/60 Hz
Harmonic Distortion:	<52%

Mechanical Information

Mounting Type:	Surface/Suspended
Outer Casing Material:	Polycarbonate/ABS
Diameter:	34.5mm

Performance Information

Lumen output from source:	See Table
CRI Rating:	80+
CCT Available:	3000K/4000K/6500K
Macadam Step:	5
Lifetime:	Up to 30,000hrs
Coloured Sleeves:	Available

Note to be added - LED module performance evaluated
Tp of 55°C & Ta of 25°C


Cat No.	Length (mm)	Illuminated Length (mm)	Lumens	Wattage
ECO LED 2 IP64	700	490	708	8
ECO LED 3 IP64	1010	800	1061	10
ECO LED 4 IP64	1310	1100	1654	15
ECO LED 5 IP64	1610	1400	2033	20

Environmental Information

IP Rating:	Luminaire - IP64
Operating Temp:	-20°C to +45°C
Safety Class:	II
Power Cable Supplied:	3m (Longer Available)

Certification

CE
UKCA

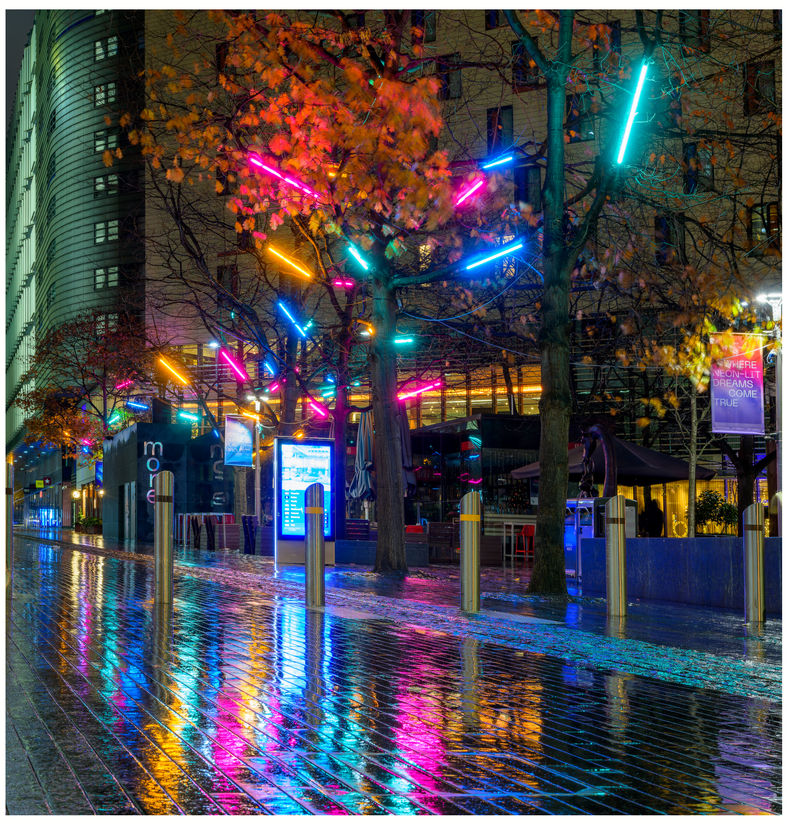



Encapsulite International Ltd
Unit 17 chartmoor Road
Chartwell business park
Leighton buzzard, LU7 4WG

For further information or options,
Call: 01525 376974
Email: sales@encapsulite.co.uk
Or visit: www.encapsulite.co.uk