MT360 LED V3

Electrical Information

Nominal Input: 24v DC

Mechanical Information

Mounting Type: Surface (Standard)
Suspended
Outer Casing: Polycarbonate/ABS
Diameter: 70mm

Performance Information

Lumen output: See Table
CRI Rating: >90
CCT Available: 2700K/3000K/4000K
Macadam Step: 3
Lifetime: Up to 50,000hrs
Coloured Sleeves: Available

Note to be added - LED module performance Evaluated. Tp of 55°C & Ta of 25°C


Environmental Information

IP Rating: Luminaire - IP20
LED Driver: Remote
Operating Temp: -20°C to +45°C
Safety Class: II
Power Cable: 3m (Longer Available)

Certification

CE
UKCA

Cat No.	Length (mm)	Lumens	Wattage	Weight (Kg)
MT360 LED V3 6	415	469	8	0.58
MT360 LED V3 7	478	556	9	0.62
MT360 LED V3 8	540	642	10	0.66
MT360 LED V3 9	603	728	11	0.70
MT360 LED V3 10	665	813	13	0.74
MT360 LED V3 11	728	900	14	0.78
MT360 LED V3 12	790	986	15	0.82
MT360 LED V3 13	853	1072	16	0.86
MT360 LED V3 14	915	1158	18	0.90
MT360 LED V3 15	978	1245	19	0.94
MT360 LED V3 16	1040	1330	20	0.98
MT360 LED V3 17	1103	1417	22	1.02
MT360 LED V3 18	1165	1503	23	1.06
MT360 LED V3 19	1228	1589	24	1.10
MT360 LED V3 20	1290	1675	25	1.14
MT360 LED V3 21	1353	1762	27	1.18
MT360 LED V3 22	1415	1847	28	1.22
MT360 LED V3 23	1478	1934	29	1.26
MT360 LED V3 24	1540	2019	31	1.30
MT360 LED V3 25	1603	2106	32	1.34
MT360 LED V3 26	1665	2192	33	1.38
MT360 LED V3 27	1728	2279	34	1.42
MT360 LED V3 28	1790	2364	36	1.46
MT360 LED V3 29	1853	2451	37	1.50
MT360 LED V3 30	1915	2536	38	1.54
MT360 LED V3 31	1978	2623	40	1.58
MT360 LED V3 32	2040	2709	41	1.62

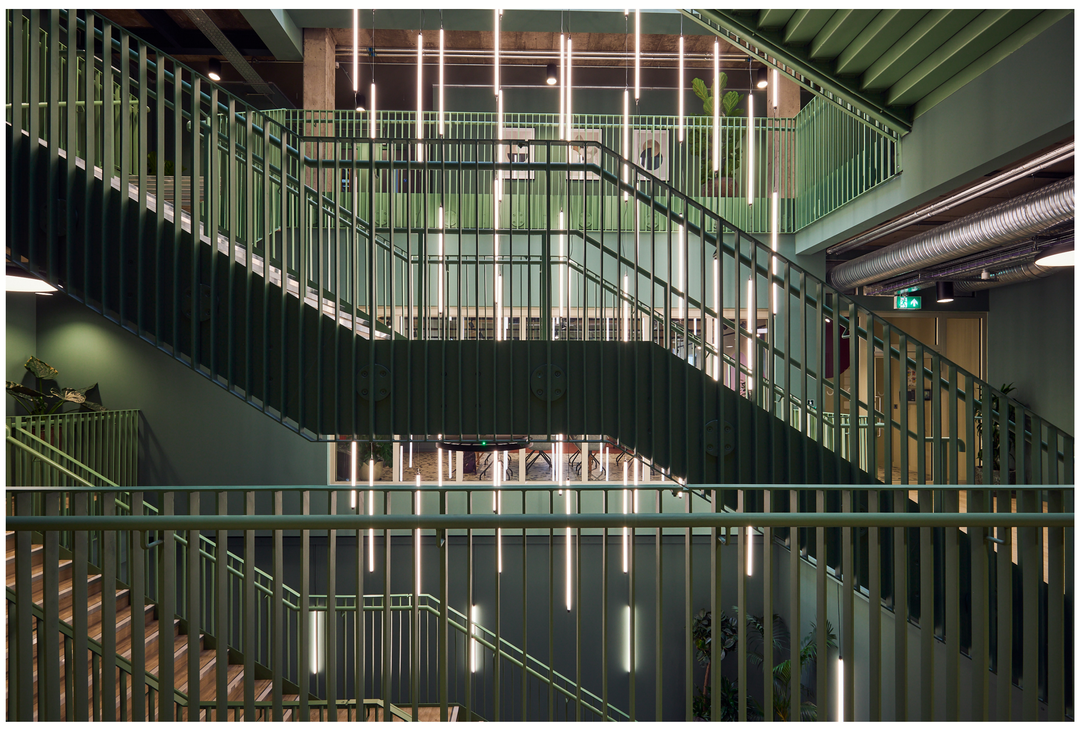

Remote Driver Options

LED Driver	Fixed	DALI	1-10v	Lead/ Traling Edge	Wireless
35w	●	●			●
60w	●	●		●	●
100w	●	●	●	●	●
150w		●		●	●
200w	●		●		
480w	●	●			

Encapsulite International Ltd
Unit 17 chartmoor Road
Chartwell business park
Leighton buzzard, LU7 4WG

For further information or options,
Call: 01525 376974
Email: sales@encapsulite.co.uk
Or visit: www.encapsulite.co.uk